



Zero in

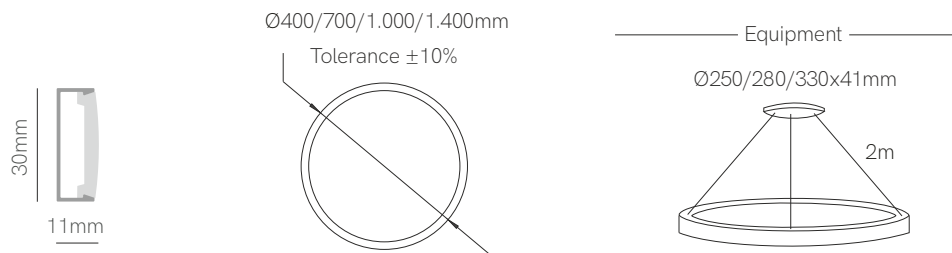

*Finished luminaire. Includes power supply, suspension kit and power cable.

Control accessories: page 327 pages 326-333 pages 334-335

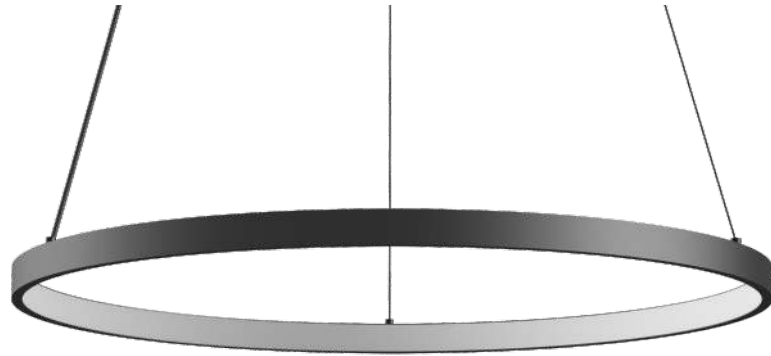


Technical Information

Power	26W / 44W / 63W / 96W
Lumens	1.560 lm - 6.912 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Flex (Fine 56)

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 1	Opal (100°) 2	400mm (26W) 2	2.700K (60 lm/W) 2	On / Off 1	○ White (9003) 1
		700mm (44W) 4	3.000K (66 lm/W) 3	Dali 2	● Black (9005) 2
		1.000mm (63W) 6	4.000K (72 lm/W) 4	Push 3 ⓘ	● Matt Gold 4
		ⓘ 1.400mm (96W) 8	RGB-W (50 lm/W) 8	Casambi 5 ⓘ	● Silver 5
			2.700-5.500K (70 lm/W) 9	Tuya 7 ⓘ	● Custom RAL

Code: **1** **2**



ⓘ Consult delivery terms and conditions.

*Create your code according to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

