


NEW

Tubi wall mini

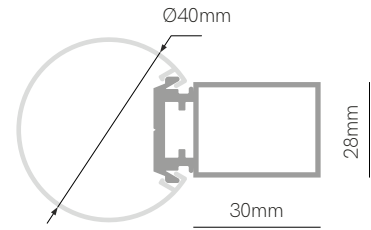

\*Finished luminaire. Includes base wall and end caps.

Control accessories:  page 327  pages 326-333  pages 334-335



Technical Information

Power	21W / 27W / 32W / 37W
Lumens	2.730 lm - 5.180 lm
Installation	Wall
Material	Aluminium and polycarbonate
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code <b>4</b>	Opal (270°) <b>0</b>	1.130mm (21W) <b>3</b>	<b>2.700K</b> (130 lm/W) <b>2</b>	On / Off <b>1</b>	○ White (9003) <b>1</b>
		1.410mm (27W) <b>4</b>	<b>3.000K</b> (135 lm/W) <b>3</b>	Casambi <b>5</b>	● Black (9005) <b>2</b>
		1.690mm (32W) <b>5</b>	<b>4.000K</b> (140 lm/W) <b>4</b>	Tuya <b>7</b>	🌈 Custom RAL
		1.970mm (37W) <b>6</b>	<b>RGB</b> (58 lm/W) <b>7</b>	Dali / Push <b>8</b>	
			<b>1.800-4.000K</b> (90 lm/W) <b>9</b>		

Code: **4 0**



ⓘ Consult delivery terms and conditions.

\*Create your code according to your preferences. RGB-W and CCT 1.800-4.000K only works with driver 5 Casambi and 7 Tuya.

