


AISCAN TCV9

2025/01
Revisión 1 / Revision 1 / Révision 1

Tapa curva vertical cóncava 90°

Vertical concave elbow 90° cover / Couvercle coude vertical concave 90°




Conforme UNE-EN/IEC 61537
In accordance with UNE-EN/IEC 61537
Conformément à la norme UNE-EN/IEC 61537



| G.S. | ⚖️ (kg/m) | G.C. | ⚖️ (kg/m) | A.R. C8 | ⚖️ (kg/m) | A (mm) | 📦 (uni.) | TAPA COVER / COUVERCLE |
|----------|-----------|----------|-----------|----------------|-----------|--------|----------|---------------------------|
| TCV9S100 | 0,33 | TCV9G100 | 0,36 | TCV9A100 | 0,33 | 100 | 1 | |
| TCV9S150 | 0,47 | TCV9G150 | 0,51 | TCV9A150 | 0,47 | 150 | 1 | |
| TCV9S200 | 0,59 | TCV9G200 | 0,64 | TCV9A200 | 0,59 | 200 | 1 | |
| TCV9S300 | 0,82 | TCV9G300 | 0,90 | TCV9A300 | 0,82 | 300 | 1 | |
| TCV9S400 | 1,07 | TCV9G400 | 1,17 | TCV9A400 | 1,07 | 400 | 1 | |
| TCV9S500 | 1,27 | TCV9G500 | 1,40 | TCV9A500 | 1,27 | 500 | 1 | |
| TCV9S600 | 1,55 | TCV9G600 | 1,70 | TCV9A600 | 1,55 | 600 | 1 | |

⚖️ Peso / Weight / Poids

📦 Embalaje / Packing / Emballage

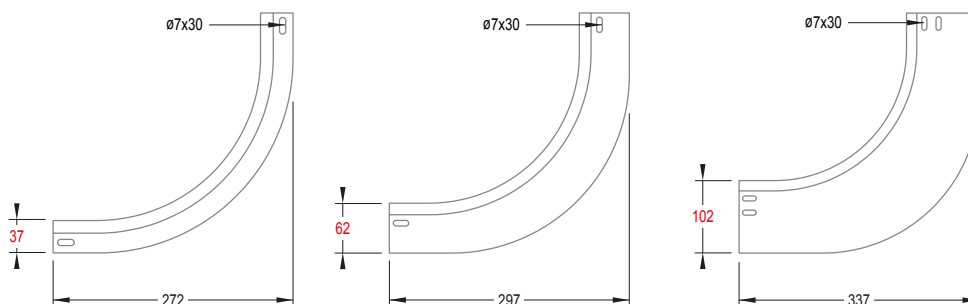



AISCAN TCV9

2025/01

Revisión 1 / Revision 1 / Révision 1

Material

Material / Matériau

- TCV9S: METÁLICO (acero galvanizado DX51+Z) / TCV9S: METALLIC (galvanised steel DX51+Z) / TCV9S: MÉTALLIQUE (acier galvanisé DX51+Z).
- TCV9G: METÁLICO (acero laminado en frío DC01) / TCV9G: METALLIC (cold rolled steel DC01) / TCV9G: MÉTALLIQUE (acier laminé à froid DC01).
- TCV9A: ZINC - ALUMINIO - MAGNESIO / TCV9A: ZINC - ALUMINIUM - MAGNESIUM / TCV9A: ZINC - ALUMINIUM - MAGNÉSIUM

Recubrimiento

Coating / Revêtement

- TCV9S: GALVANIZADO SENDZIMIR (G.S.) según UNE-EN 10346 / TCV9S: SENDZIMIR GALVANIZED (SG) according to UNE-EN 10346 / TCV9S: GALVANISÉ SENDZIMIR (G.S.) selon IEC/CEI-EN 10346.
- TCV9G: GALVANIZADO CALIENTE (G.C.) según UNE-EN ISO 1461 / TCV9G: HOT-DIP GALVANIZED (HDG) according to UNE-EN ISO 1461 / TCV9G: GALVANISÉ À CHAUD (G.C.) selon IEC/CEI-EN ISO 1461.
- TCV9A: GALVANIZADO SENDZIMIR "MAGNELIS" MZ / TCV9A: SENDZIMIR GALVANIZED "MAGNELIS" ZM / TCV9A: GALVANISÉ SENDZIMIR "MAGNELIS" MZ

Tornillería necesaria

Fasteners required: / Visserie nécessaire

- G.S.: mínimo / minimum / minimum: 4x CTCZ612
- G.C.: mínimo / minimum / minimum: 4x CTCG612
- A.R.: mínimo / minimum / minimum: 4x CTCG612/Zn-Ni

Características de instalación

Installation features / Caractéristiques d'installation

- La instalación de este producto se realizará según instrucciones del R.E.B.T.
- The installation of this product shall be carried out according to the instructions of the R.E.B.T.
- L'installation de ce produit sera réalisée selon les instructions du R.E.B.T.

- Aiscan, S.L. recomienda el uso exclusivo de este tipo de material por parte de profesionales.
- Aiscan, S.L. recommends the exclusive use of this type of material by professionals.
- Aiscan, S.L. recommande l'usage exclusif de ce type de matériel par des professionnels.

Copia no controlada. Esta información puede ser modificada por Aiscan sin previo aviso / Uncontrolled copy. This information may be modified by Aiscan without prior notice / Copie non contrôlée. Cette information peut être modifiée par Aiscan sans préavis.