
PRODUCT SPECIFICATION

PLUG METRIC SLEEVE MTMEG

TYPE	COMPOSITION	D	d1	d2	TOLER. mm	L	TOLER. LENGTH	UNITS/ BOX	COLOUR
AISCAN-MTMEG-16	STEEL	18,3	16,2	15,5	+-0,2	45	+-1	100	ZINC
AISCAN-MTMEG-20	"	22,3	20,3	19,5	+-0,2	50	+-1	100	"
AISCAN-MTMEG-25	"	28	25,3	24,5	+-0,2	55	+-1	60	"
AISCAN-MTMEG-32	"	35,4	32,3	31,5	+-0,2	65	+-1	30	"
AISCAN-MTMEG-40	"	43,4	40,5	39,5	+-0,2	70	+-1	25	"
AISCAN-MTMEG-50	"	53,4	50,5	49,5	+-0,2	90	+-1	12	"
AISCAN-MTMEG-63	"	67	63,6	62,4	+-0,2	105	+-1	6	"

EDITION DATE	EDITION NUMBER	CARD NUMBER
2009/02	2	EP-MTMEG

- **THESE ACCESSORIES ARE USED IN NO THREADABLES METRICS TUBES IN ACCORDING TO UNE-EN 60423**

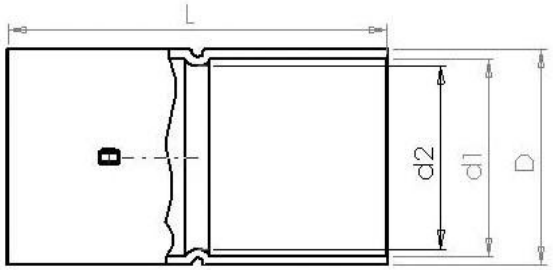

SPECIFICATIONS ACCORDING TO STANDARD UNE-EN 61386-21

- CODE: 555711544010
- OPERATING TEMPERATURE RANGE: -45 + 400ºC
- CRUSHING STRENGTH: > 4000N
- IMPACT RESISTANCE: >20J AT -45ºC
- CORROSION RESISTANCE: HIGH
- FLAME PROPAGATE: NO
- MATERIAL: COLD ROLLED STELL WITH LOW CONTENT CARBON. QUALITY TYPE DC03, IN ACCORDING TO STANDARD EN-10130. HOT DIP GALVANISED FINISH.

- **NO CONTROLLED COPY. THIS INFORMATION COULD BE MODIFIED BY AISCAN WHITOUT PREVIOUS ADVERTISMENT.-**