
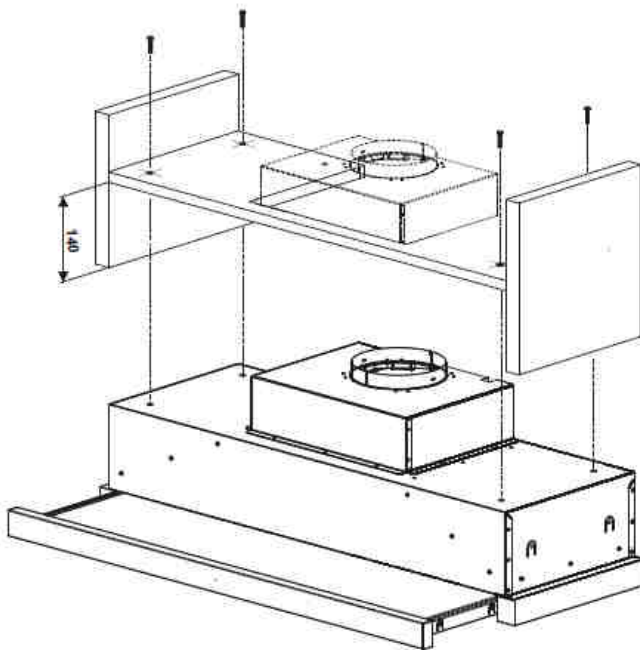
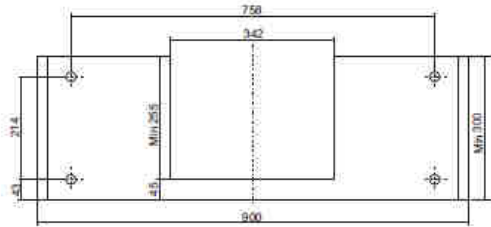
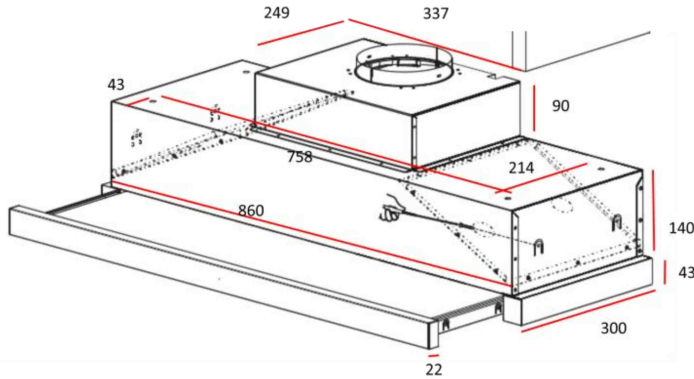


## CNL 9610 INOX

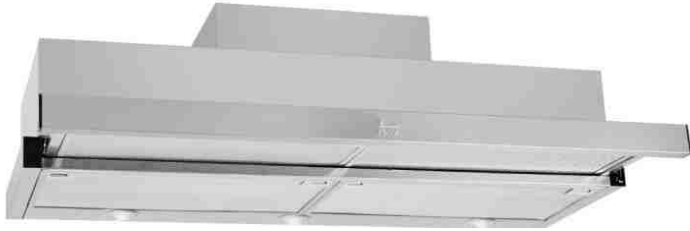

## FEATURES

- Stainless Steel
- Motor: 1 C Class energy efficiency
- Conventional extraction
- Electronic controls
- 3 speeds
- 2x1,5W LED lamps
- Aluminum filters
- Air outlet 150mm
- European plug included
- Optional recirculation mode (D4C filter)
- Annual Energy Consumption ( $AEC_{hood}$ ) kWh/a 107
- Energy Efficiency class C
- Fluid Dynamic Efficiency ( $FDE_{hood}$ ) 17,2
- Fluid Dynamic Efficiency class D
- Light Efficiency (Lehood) lux/Watt 33,3
- Lighting Efficiency class A
- Grease Filtering Efficiency ( $GFE_{hood}$ ) % 72,8
- Grease Filtering Efficiency class D
- Air flow ( $Q_{min}$ ) m<sup>3</sup>/h 330
- Air flow ( $Q_{max}$ ) m<sup>3</sup>/h 445
- Air flow ( $Q_{boost}$ ) m<sup>3</sup>/h 694
- Noise (LwA) Min Speed dB 60
- Noise (LwA) Max Speed dB 63
- Noise (LwA) Boost Speed dB 70
- Off mode Power ( $P_o$ ) W N/A
- Standby Power ( $P_s$ ) W N/A
- Energy Efficiency Index ( $EEL_{hood}$ ) 82,7
- Time increase actor (f) 1,4
- Air flow at best efficiency point ( $Q_{bep}$ ) m<sup>3</sup>/h 433
- Air pressure at best efficiency point ( $P_{bep}$ ) Pa 290
- Electric power input at best efficiency point ( $W_{bep}$ ) W 203
- Nominal power of the lighting system (WL) W 4,5
- Average illumination of the lighting system on the cooking surface ( $E_{middle}$ ) Lux 150

DESCRIPTION	TKI CODE	EAN
CNL 9610 INOX	40436850	8421152146255