
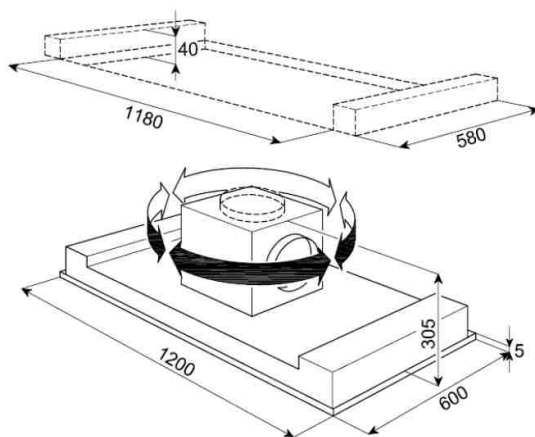


DHT 1285

CHARACTERISTICS

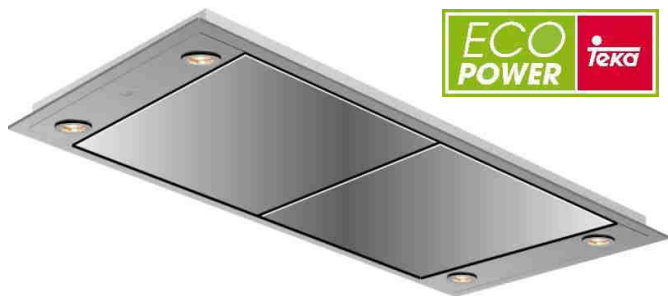

- Ceiling concept hood
- 120 cm width
- Rim- extraction
- Remote control digital programmer
- LED 4x3W lamps
- 3 speeds + Intensive
- Stop delay timer
- Filter saturation indicator
- Aluminum filters
- Double turbine motor
- Reduction 150/120mm included
- Annual Energy Consumption (AEC_{hood}) kWh/a 46,7
- Energy Efficiency class A
- Fluid Dynamic Efficiency (FDE_{hood}) 32,1
- Fluid Dynamic Efficiency class A
- Light Efficiency (Lehood) lux/Watt 58,3
- Lighting Efficiency class A
- Grease Filtering Efficiency (GFE_{hood}) % 86,8
- Grease Filtering Efficiency class B
- Air flow (Qmin) m³/h 315
- Air flow (Qmax) m³/h 631
- Air flow (Qboost) m³/h 807
- Noise (LwA) Min Speed dB 47
- Noise (LwA) Max Speed dB 60
- Noise (LwA) Boost Speed dB 66
- Off mode Power (Po) W 0
- Standby Power (Ps) W 0,98
- Energy Efficiency Index (EEI_{hood}) 49,9
- Time increase actor (f) 0,8
- Air flow at best efficiency point (Qbep) m³/h 329,8
- Air pressure at best efficiency point (Pbep) Pa 456
- Electric power input at best efficiency point (Wbep) W 130,1
- Nominal power of the lighting system (WL) W 12
- Average illumination of the lighting system on the cooking surface (Emiddle) Lux 700

MODEL	TKI CODE	EAN CODE
DHT 1285 INOX	40484180	8421152145890