
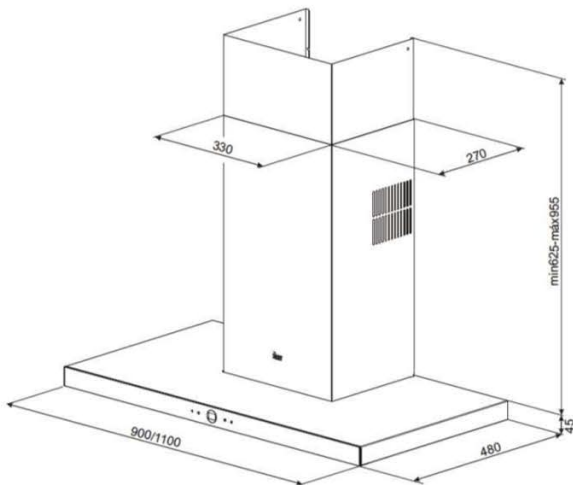


DSJ 680/980

CHARACTERISTICS

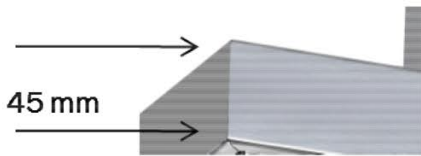

- Rectangular Push Buttons
- Operating Pilot Light
- Conventional extraction
- 4 speeds
- 2 X 1,5 W LED lamps
- Stainless steel filters
- Double turbine motor
- Reduction 150/120mm included
- European plug included
- Optional recirculation mode (SET D1CTP)
- Annual Energy Consumption (AEC_{hood}) kWh/a 96,7
- Energy Efficiency class C
- Fluid Dynamic Efficiency (FDE_{hood}) 16,4
- Fluid Dynamic Efficiency class D
- Light Efficiency (Le_{hood}) lux/Watt 35/31,7
- Lighting Efficiency class A
- Grease Filtering Efficiency (GFE_{hood}) % 76,1
- Grease Filtering Efficiency class C
- Air flow (Q_{min}) m³/h 268
- Air flow (Q_{max}) m³/h 614
- Noise (L_{WA}) Min Speed dB 48
- Noise (L_{WA}) Max Speed dB 66
- Off mode Power (P_o) W 0,0
- Standby Power (P_s) W 0,0
- Energy Efficiency Index (EEI_{hood}) 81,5
- Time increase actor (f) 1,4
- Air flow at best efficiency point (Q_{bep}) m³/h 363,1
- Air pressure at best efficiency point (P_{bep}) Pa 301
- Electric power input at best efficiency point (W_{bep}) W 185
- Nominal power of the lighting system (WL) W 3
- Average illumination of the lighting system on the cooking surface (E_{middle}) Lux 105/95

MODEL	TKI CODE	EAN CODE
DSJ 680	40484820	8421152157312
DSJ 980	40484821	8421152157329