


# GFH 55/73



## CHARACTERISTICS

- . Filter group
- . Push button control panel
- . Stainless steel
- . Double turbine motor
- . Exhaust capacities; maximum in test conditions: 756 m<sup>3</sup>/h, free outlet: 540 m<sup>3</sup>/h, UNE-EN-61591: 380 m<sup>3</sup>/h
- . 3 speeds
- . Soft design metal filters
- . Integrated halogen lamps
- . Operating pilot light
- . Built-in installation
- . Sound level (UNE EN 60704-2-13): 46 dB( A)
- . 55 cm model
- . GFH 73: Same features as GFH 55, 73 cm. model

## TECHNICAL DRAWING

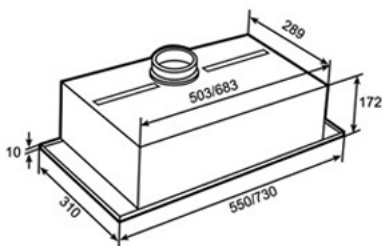

## Electric Characteristics

Power supply (V) 220-240 / 50 Hz	•
Power supply (V) 127 / 60 Hz	-
Light power (W)	2x20
Motor power (W)	160
Maximum power (W)	200
Air outlet (ø mm)	120
Optional reduction (ø 150 / ø 120)	-
Optional recirculation kit	•

## Capacity and sound levels

Exhaust capacity, test conditions (m <sup>3</sup> /h)	756
Exhaust capacity, free outlet (m <sup>3</sup> /h)	540
Exhaust capacity, UNE EN 61591 (m <sup>3</sup> /h)	380
Sound level (re 1pw UNE EN 60704-2-13) dB	60
Sound power level dB (A) UNE EN 60704-2-13	46

## Control panel

Touch control	-
Electronic	-
Push button	•
Mechanical slider	-
Mechanical inswing	-

## Features

Number of motors	1
Double turbine motor	•
Armoured motor	-
Number of speeds	3
Stop delay timer	-
Easy-clean inside panel	-
Decorative filter	-
Metal filter	•
Operating pilot light	•
Filter saturation indicator	-
Humidity detector	-
Perimeter system	-
Remote control	-