


# DDL 9830.0 W

Built-in ceiling canopy hood

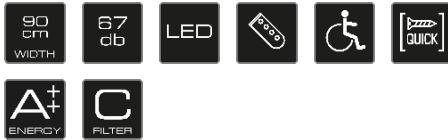

## EAN / TKI Code

- EAN Code 4037321047670
- TKI Code 123100002

## Features

- 6 power levels incl. high power settings
- Extraction rate (to the outside): max. normal power setting 634 m³/h, intensive power setting 808 m³/h
- Electronic control with remote control
- Remote control with LED power level indicator
- Rim suction technology with glass panel
- Drop down glass panel
- Automatic delay stop
- Filter saturation indicator
- Dimmable LED lighting
- Metal grease filter
- FreshAir function
- Recirculation air mode possible (see optional accessories)

## Technical data

- Electrical connection 227 W
- Exhaust air connection Ø 150 mm
- For installation in 4 directions


## Optional accessories

- Charcoal filter ZD 1015
- Recirculation box incl. ceramic filter ZD 1016


## Dimensions

- Appliance dimensions W x H x D  
900 x 216 x 600 mm
- Nice dimensions W x D  
580 x 880 mm

## Drawing

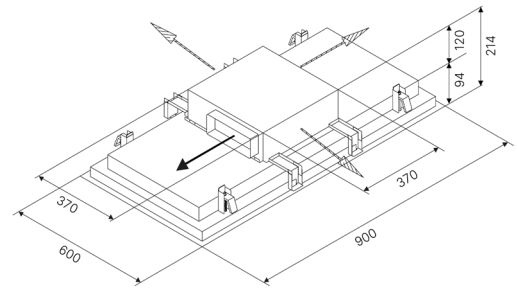

## Energy label

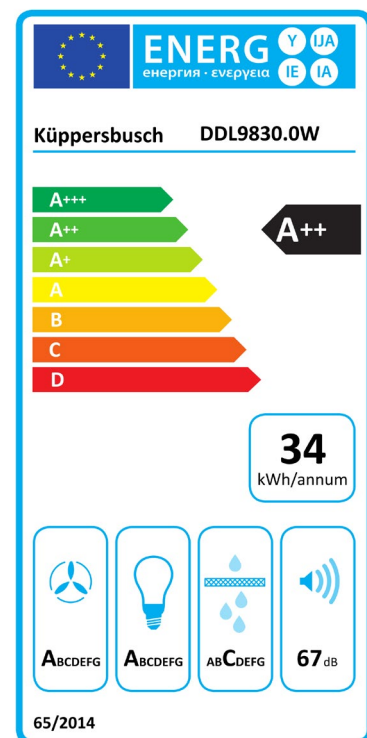

## Product Information Sheet

Delegated Regulation (EU) 65/2014

|                                                                               |                       |
|-------------------------------------------------------------------------------|-----------------------|
| Supplier name or trademark                                                    | <b>Küppersbusch</b>   |
| Model identifier                                                              | <b>DDL9830.0W</b>     |
| Annual Energy Consumption                                                     | <b>34.4 kWh/annum</b> |
| Energy Efficiency Class                                                       | <b>A++</b>            |
| Fluid Dynamic Efficiency                                                      | <b>37.7</b>           |
| Fluid Dynamic Efficiency class                                                | <b>A</b>              |
| Lighting Efficiency                                                           | <b>80 Lux/W</b>       |
| Lighting Efficiency class                                                     | <b>A</b>              |
| Grease Filtering Efficiency                                                   | <b>77 %</b>           |
| Grease Filtering Efficiency class                                             | <b>C</b>              |
| Air flow (min speed normal use)                                               | <b>317 m3/h</b>       |
| Air flow (max speed normal use)                                               | <b>634 m3/h</b>       |
| Air flow (intensive or boost use)                                             | <b>808 m3/h</b>       |
| Airborne acoustical A-weighted sound power emissions (min speed normal use)   | <b>50 dB</b>          |
| Airborne acoustical A-weighted sound power emissions (max speed normal use)   | <b>67 dB</b>          |
| Airborne acoustical A-weighted sound power emissions (intensive or boost use) | <b>74 dB</b>          |
| Power consumption in off mode (W)                                             | <b>0 W</b>            |
| Power consumption in standby mode (W)                                         | <b>0.49 W</b>         |