

# DEL 8550.0 E

Built-in canopy cooker hood



## EAN / TKI Code

- EAN Code 4037321049087
- TKI Code 123100004

## Features

- 4 Power levels incl. high power setting
- Extraction rate (to the outside): max. normal power setting 425 m³/h, Intensive power setting 760 m³/h
- Electronic control with touch control sensors
- Rim suction
- FreshAir Funktion
- Automatic delay stop
- Metal grease filter
- Recirculation mode possible (see optional accessories)

## Technical data

- Electrical connection 286 W
- Exhaust air connection Ø 150 mm
- LED light colour 4,000 – 4,500 Kelvin


## Optional accessories

- Charcoal filter 881 (2 pieces needed)


## Dimensions

- Appliance dimensions W x H x D approx. 712 x 282 x 284 mm
- Niche dimensions W x D approx. 678 x 260 mm

## Drawing

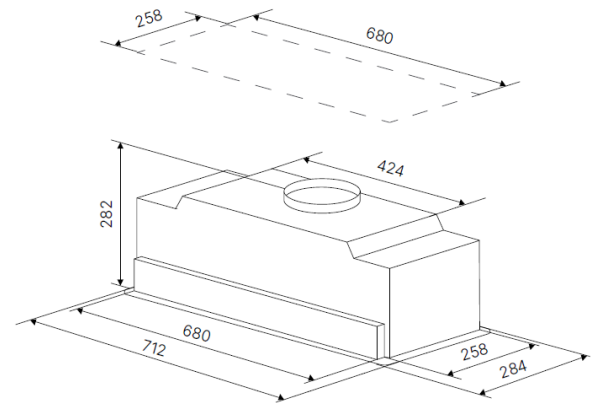

## Energy label

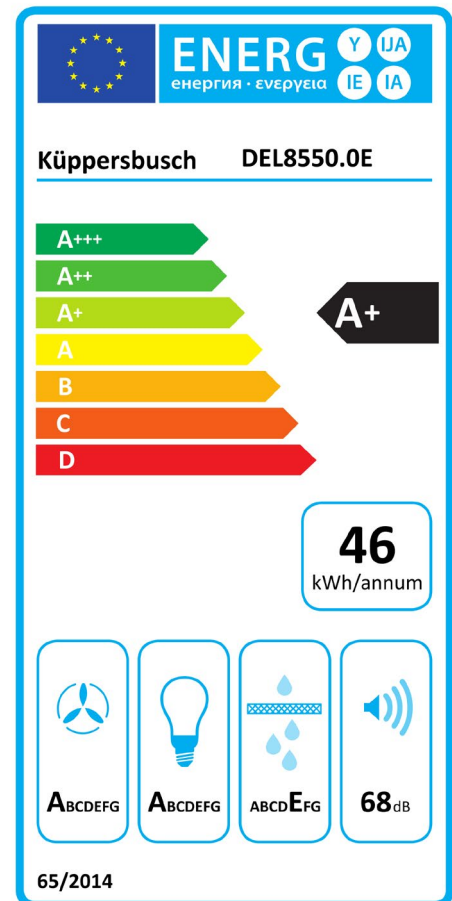

Küppersbusch

| <b>Product fiche</b>                                                          |                       |
|-------------------------------------------------------------------------------|-----------------------|
| Delegated Regulation (EU) 65/2014                                             |                       |
| Supplier name or trademark                                                    | <b>Küppersbusch</b>   |
| Model identifier                                                              | <b>DEL8550.0E</b>     |
| Annual Energy Consumption                                                     | <b>46,0 kWh/annum</b> |
| Energy Efficiency Class                                                       | <b>A+</b>             |
| Fluid Dynamic Efficiency                                                      | <b>35,8</b>           |
| Fluid Dynamic Efficiency class                                                | <b>A</b>              |
| Lighting Efficiency                                                           | <b>44,8 Lux/W</b>     |
| Lighting Efficiency class                                                     | <b>A</b>              |
| Grease Filtering Efficiency                                                   | <b>60,7 %</b>         |
| Grease Filtering Efficiency class                                             | <b>E</b>              |
| Air flow (min speed normal use)                                               | <b>327 m³/h</b>       |
| Air flow (max speed normal use)                                               | <b>591 m³/h</b>       |
| Air flow (intensive or boost use)                                             | <b>726 m³/h</b>       |
| Airborne acoustical A-weighted sound power emissions (min speed normal use)   | <b>54 dB</b>          |
| Airborne acoustical A-weighted sound power emissions (max speed normal use)   | <b>68 dB</b>          |
| Airborne acoustical A-weighted sound power emissions (intensive or boost use) | <b>70 dB</b>          |
| Power consumption in standby mode (W)                                         | <b>0,44 W</b>         |