

DW 9500.0S

Chimney cooker hood



EAN / TKI Code

- EAN Code 4037321039538
- TKI Code 122970000

Features

- 4 power levels incl. high power setting
- Extraction rate (to the outside): max. normal power setting 650 m³/h, intensive power setting 764 m³/h
- Electronic control with touch control sensors
- Digital display
- Automatic delay stop
- Filter saturation indicator
- Metal grease filter
- Adjustable to ceiling height due to telescopic chimney section
- Recirculation air mode possible (see optional accessories)

Technical data

- Electrical connection 172 W
- Exhaust air connection Ø 150 mm
- LED light colour 4,000 – 4,500 Kelvin

Optional accessories

- Charcoal filter ZD 1001
- PlasmaMade filter ZD 8000


Individual Design Kits

- Stainless Steel DK 9011
- Black Chrome DK 9012
- Silver Chrome DK 9013
- Gold DK 9014
- Copper DK 9017

Dimensions

- Appliance dimensions W x H x D approx.
900 x 670-1,000 x 480 mm


Drawing

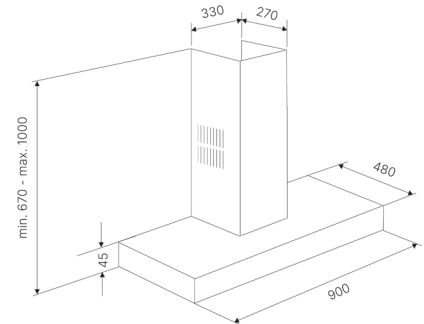

In recirculation mode, maintain sufficient distance from adjacent surfaces to avoid air turbulence.

Dimension from lower edge of hood to upper edge of exhaust air connection X = 300 mm.

Energy label

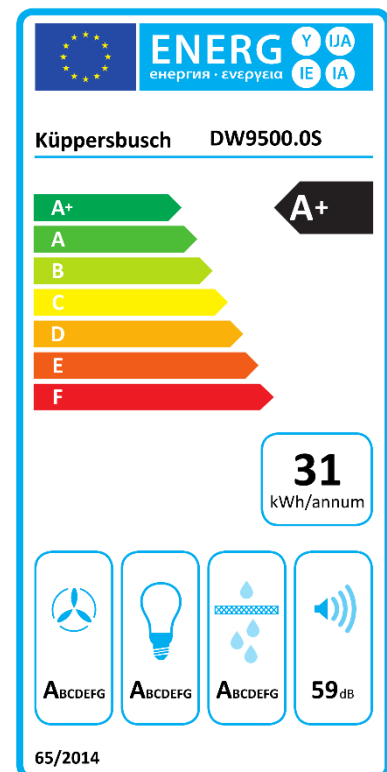

Küppersbusch

Product Information Sheet

Delegated Regulation (EU) 65/2014

Supplier name or trademark	Küppersbusch
Model identifier	DW9500.0S
Annual Energy Consumption	31.1 kWh/annum
Energy Efficiency Class	A+
Fluid Dynamic Efficiency	35.1
Fluid Dynamic Efficiency class	A
Lighting Efficiency	55.7 Lux/W
Lighting Efficiency class	A
Grease Filtering Efficiency	98.2 %
Grease Filtering Efficiency class	A
Air flow (min speed normal use)	371 m3/h
Air flow (max speed normal use)	650 m3/h
Air flow (intensive or boost use)	764 m3/h
Airborne acoustical A-weighted sound power emissions (min speed normal use)	38 dB
Airborne acoustical A-weighted sound power emissions (max speed normal use)	59 dB
Airborne acoustical A-weighted sound power emissions (intensive or boost use)	66 dB
Power consumption in off mode (W)	0.32 W