AKDO ETERNIT classic, timeless, elegant, sophi eternally tasteful. Far Beyond the Surface

Empire



Eternity Empire Ash Gray (H)
w/ Thassos (H)

MB1809-EMPIH1



Special Order

Eternity Empire Carrara Bella (H)

w/ Dove Gray (C)

MB1604-EMPIH1


Imperial



Eternity Imperial Ash Gray (H)

w/ Thassos (H)

MB1809-IMPLH1



Special Order

Eternity Imperial Carrara Bella (H) w/ Dove Gray (C)

MB1604-IMPLH1

Quattro



Special Order

Eternity Quattro Ash Gray (H) w/ Thassos (H) MB1809-QUATH1



Special Order

Eternity Quattro Carrara Bella (H) w/ Dove Gray (C)


MB1604-QUATH1

Timeless



Eternity Timeless Ash Gray (H)
w/ Thassos (H)

MB1809-TIMEH1




Special Order

Eternity Timeless Carrara Bella (H)

w/ Dove Gray (C)

MB1604-TIMEH1

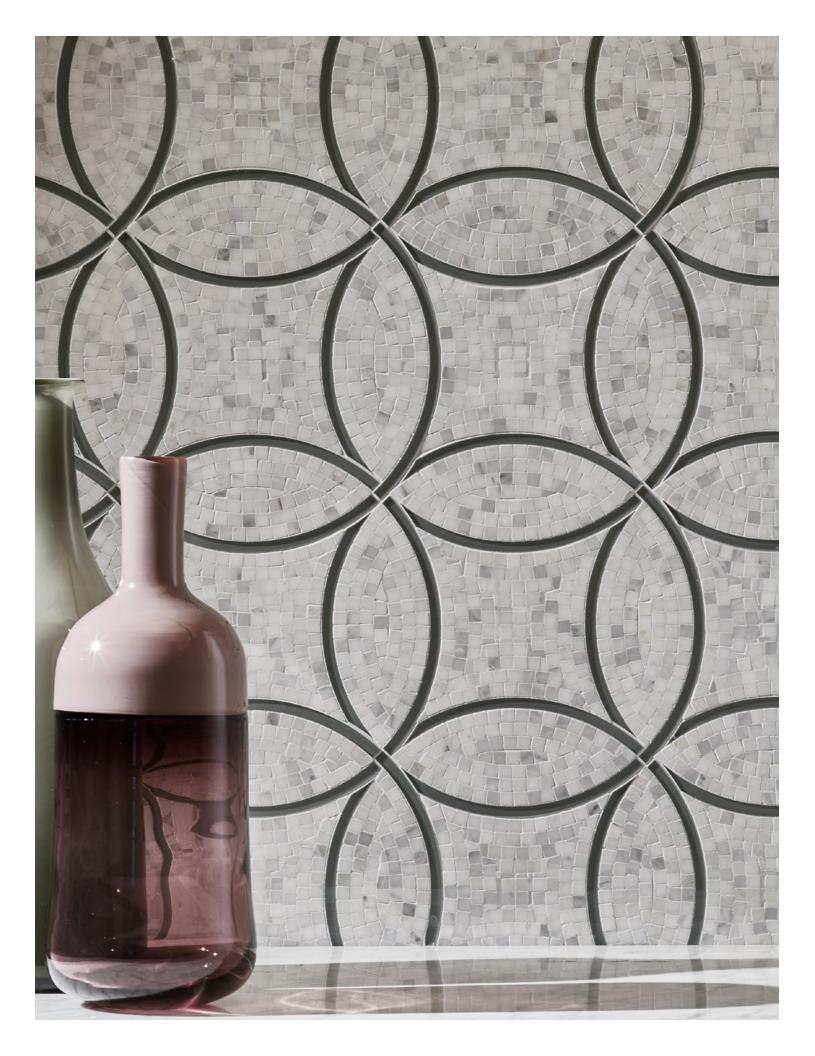

CONVERSION CHART

PROFILE	SIZE
Empire	$12'' \times 12'' = 1 \text{ sqft}$
Imperial	$11.63'' \times 11.63'' = .937 \text{ sqft}$
Quattro	$11.25'' \times 11.25'' = .870 \text{ sqft}$
Timeless	$11.41'' \times 11.41'' = .904 \text{ sqft}$

APPLICATIONS

Ash Gray w/ Thassos	WALL	FLOOR	EXTERIOR FREEZE/ THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH
	Yes	Yes	No	Yes, when properly sealed	Yes, when properly sealed	No	Yes
	FIREPLACE INTERIOR TRAFFIC SURROUND						
	Yes	Yes	Stand Com	dard mercial			
Carrara Bella w/ Dove Gray	WALL	FLOOR	EXTERIOR FREEZE/ THAW	STEAM SHOWER	WET AREA	POOL	BACKSPLASH
	Yes	No	No	Yes, when properly sealed	Yes, when properly sealed	No	Yes – Heat Not to Exceed 1472°F
	FIREPLAC SURROUI		TERIOR T	RAFFIC			
	Yes – Hed Not to Ex 1472°F		-	-			

TECHNICAL DATA

FEATURES	SPECIFICATION
DCOF	Due to the natural characteristics and variation in natural stone, slip resistance will vary. Such factors are dependent on lots, finish and the topical sealant applied. There is currently no standard industry test with the ability to measure the exact slip resistance.
	In order to reduce the slipperiness of stone surfaces, AKDO suggests selecting a Non-Polished finish such as Honed, Sandblasted, or Textured stone, or choosing a mosaic, as the grout joints in the stone result in an increase of friction.

Due to the inherent characteristics of natural stone, there may be variations in color, movement and texture from lot to lot. For detailed installation guidelines, visit akdo.com.

AKDO

1435 State Street Bridgeport, CT 06605 1.800.811.2536 203.336.5199 (o) 203.336.0603 (f)

AKDO NYC

22 West 21st Street New York, NY 10010 1.800.811.2536 212.485.0448 (o) 212.485.0449 (f)

AKDO Pacific

3445 Arden Road Hayward, CA 94545 1.888.909.2536 510.785.2536 (o) 510.785.0895 (f)

akdo.com



