

LIGHTING DATA

	CONTOUR ^{HD24}	254 lm
Luminaire Lumens (per metre)	CONTOUR ^{HD27}	274 lm
	CONTOUR ^{HD24}	27 lm/W/m
Lumens/Watt/Metre	CONTOUR ^{HD27}	29 lm/W/m
Lifetime L70/B10		>50,000 hrs
LOR		51%

CONNECTIONS AND MECHANICAL


Maximum Length	2000mm
Mounting	Mounting clips featuring 3mm fixing hole
IP Rating	IP20
Max Ambient °C	36°C

PRODUCT CODE



15mm Trimless Aluminium Extrusion (2 metre)
 Inclusive of 1no. of each type of End Cap and 4no. Mounting Clips ACPC15TL2

ACCESSORY CODES


15mm Trimless End Cap Complete With Cable Entry Holes	ACEC15LH2
15mm Trimless Mounting Clip	ACMC15TL2
15mm Trimless End Cap With Out Cable Entry Holes	ACEC15LX2

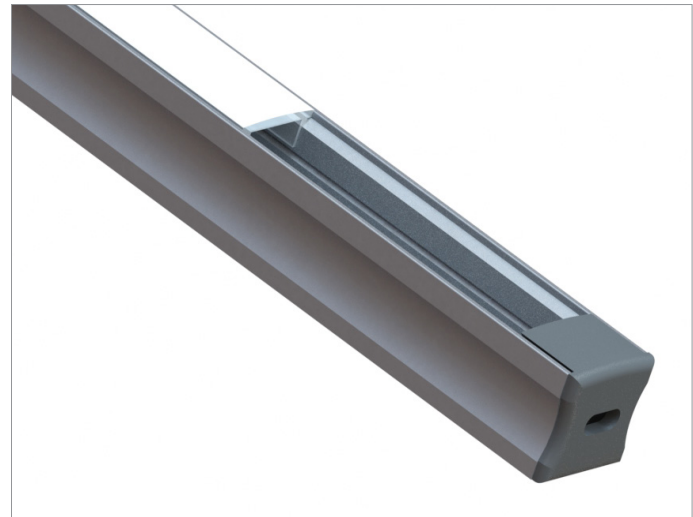

v.1.4

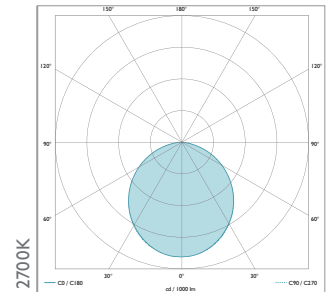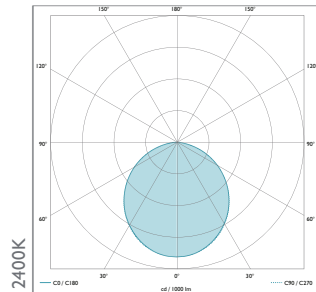


CONCEPT DETAIL

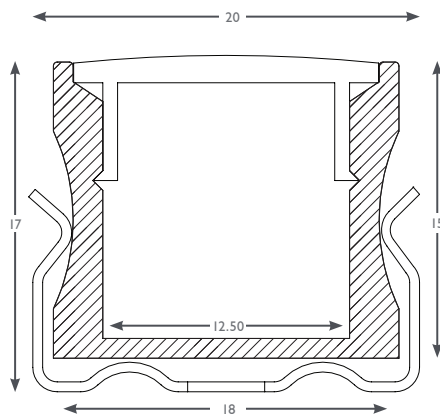


NB: ALL SURFACES MUST BE MATT
 DIMENSIONS IN mm. TO THE PRODUCT
 NOT TO SCALE

NB: OPTIC PUSH FITS INTO EXTRUSION

FRONT LIGHTING SHELF DETAIL

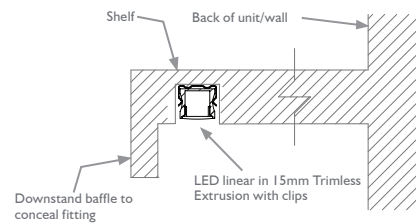

UPLIGHTING SHELF DETAIL

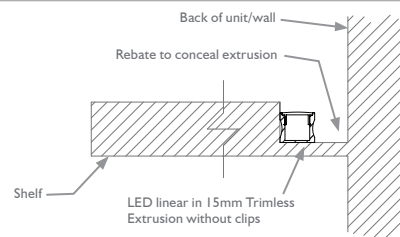

NB: IF YOU HAVE HAD A DESIGN SERVICE PLEASE REFER TO THE DETAILS PROVIDED BY YOUR DESIGNER

COMPATIBLE DRIVERS

We have a variety of drivers available including DALI, 1-10V and mains dimmable, for the best solution, please call us on the numbers below.