

### LIGHTING DATA

	CONTOUR <sup>HD24</sup>	337 lm
Luminaire Lumens (per metre)	CONTOUR <sup>HD27</sup>	364 lm
	CONTOUR <sup>HD24</sup>	36 lm/W/m
Lumens/Watt/Metre	CONTOUR <sup>HD27</sup>	39 lm/W/m
Lifetime L70/B10		>50,000 hrs
LOR		67%

### CONNECTIONS AND MECHANICAL


Maximum Length	2000mm
Mounting	Mounting clips featuring 4mm fixing hole
IP Rating	IP20
Max Ambient °C	25°C

### PRODUCT CODE



7mm Trimless Aluminium Extrusion (2 metre)  
 Inclusive of 1no. of each type of End Cap and 4no. Mounting Clips ACCPX7TL2

### ACCESSORY CODES


7mm Trimless End Cap Complete With Cable Entry Holes	ACEC7TLH2
7mm Trimless Mounting Clip	ACMCX7TL2
7mm Trimless End Cap With Out Cable Entry Holes	ACEC7TLX2

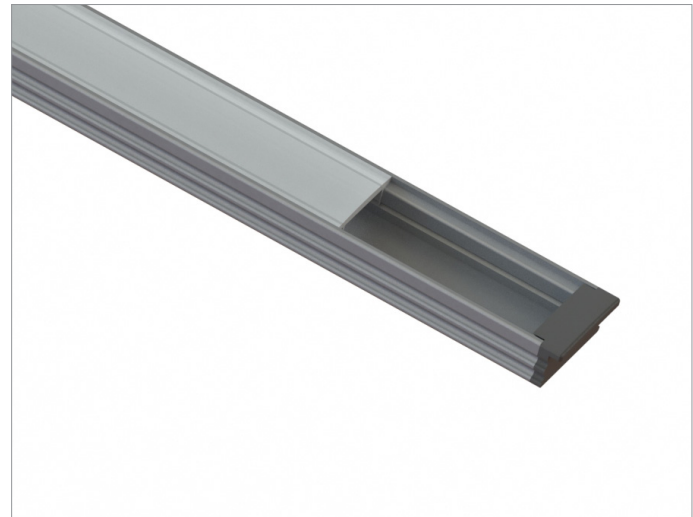

V.1.3

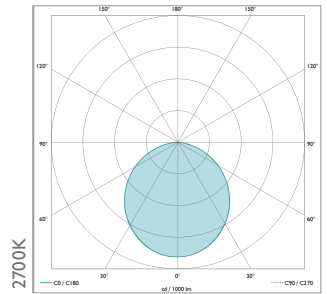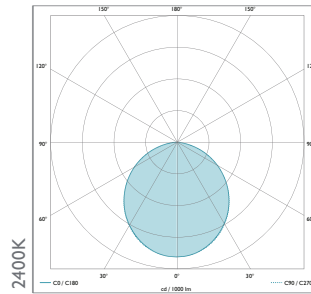


### CONCEPT DETAIL

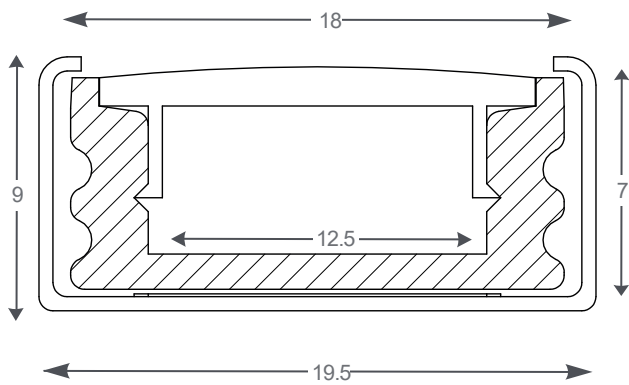


NB: ALL SURFACES MUST BE MATT  
 DIMENSIONS IN mm. TO THE PRODUCT  
 NOT TO SCALE

NB: OPTIC RUSH FITS INTO EXTRUSION

### FRONT LIGHTING SHELF DETAIL

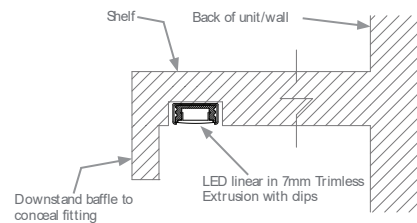

### BACK LIGHTING SHELF DETAIL

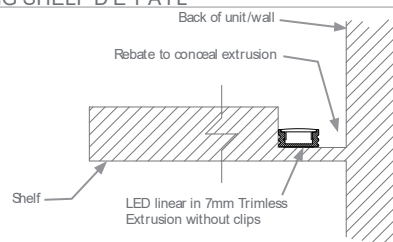

NB: IF YOU HAVE HAD A DESIGN SERVICE PLEASE REFER TO THE DETAILS PROVIDED BY YOUR DESIGNER

### COMPATIBLE DRIVERS

We have a variety of drivers available including DALI, 1-10V and mains dimmable, for the best solution, please call us on the numbers below.