

LIGHTING DATA

	CONTOUR <sup>HD24</sup>	354 lm
Luminaire Lumens (per metre)	CONTOUR <sup>HD27</sup>	382 lm
	CONTOUR <sup>HD24</sup>	38 lm/W/m
Lumens/Watt/Metre	CONTOUR <sup>HD27</sup>	41.02 lm/W/m
Lifetime L70/B10		>50,000 hrs
LOR		71%

CONNECTIONS AND MECHANICAL

Maximum Length	2000mm
Mounting	Mounting clips featuring 4mm fixing hole
IP Rating	IP20
Max Ambient °C	34°C

PRODUCT CODE



16mm x 16mm Corner Section Aluminium Extrusion (2 metre)  
 Inclusive of 1no. of each type of End Cap and 4no. Mounting Clips ACCPR16CS

ACCESSORY CODES


16mm x 16mm End Cap Complete With Cable Entry Holes	ACEC16CSH
16mm x 16mm Mounting Clip	ACCL16CS1
16mm x 16mm End Cap With Out Cable Entry Holes	ACEC16CSX



v.1.3

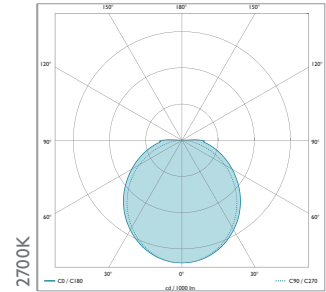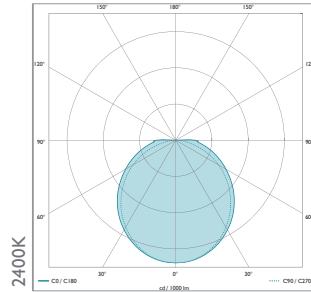


CONCEPT DETAIL

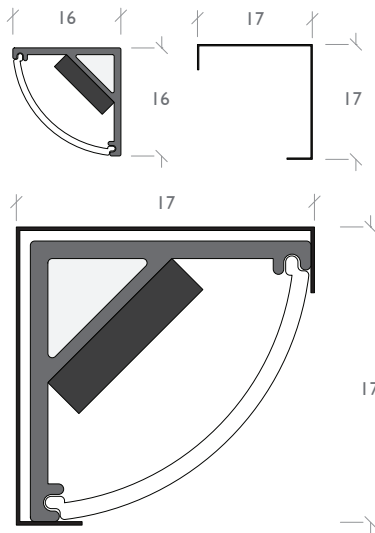


NB: ALL SURFACES MUST BE MATT.  
 DIMENSIONS IN mm. TO THE PRODUCT  
 NOT TO SCALE

UNDER SHELF DETAIL

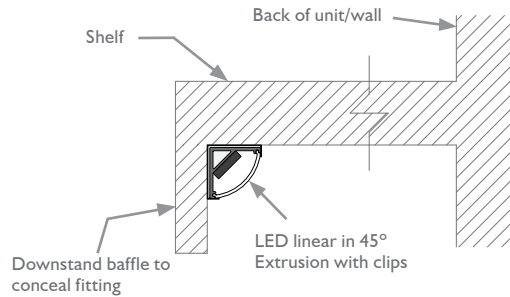

VERTICAL IN WARDROBE DETAIL

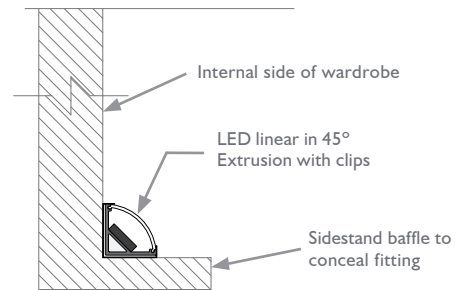

NB: IF YOU HAVE HAD A DESIGN SERVICE PLEASE REFER TO THE DETAILS PROVIDED BY YOUR DESIGNER

COMPATIBLE DRIVERS

We have a variety of drivers available including DALI, 1-10V and mains dimmable, for the best solution, please call us on the numbers below.