



7

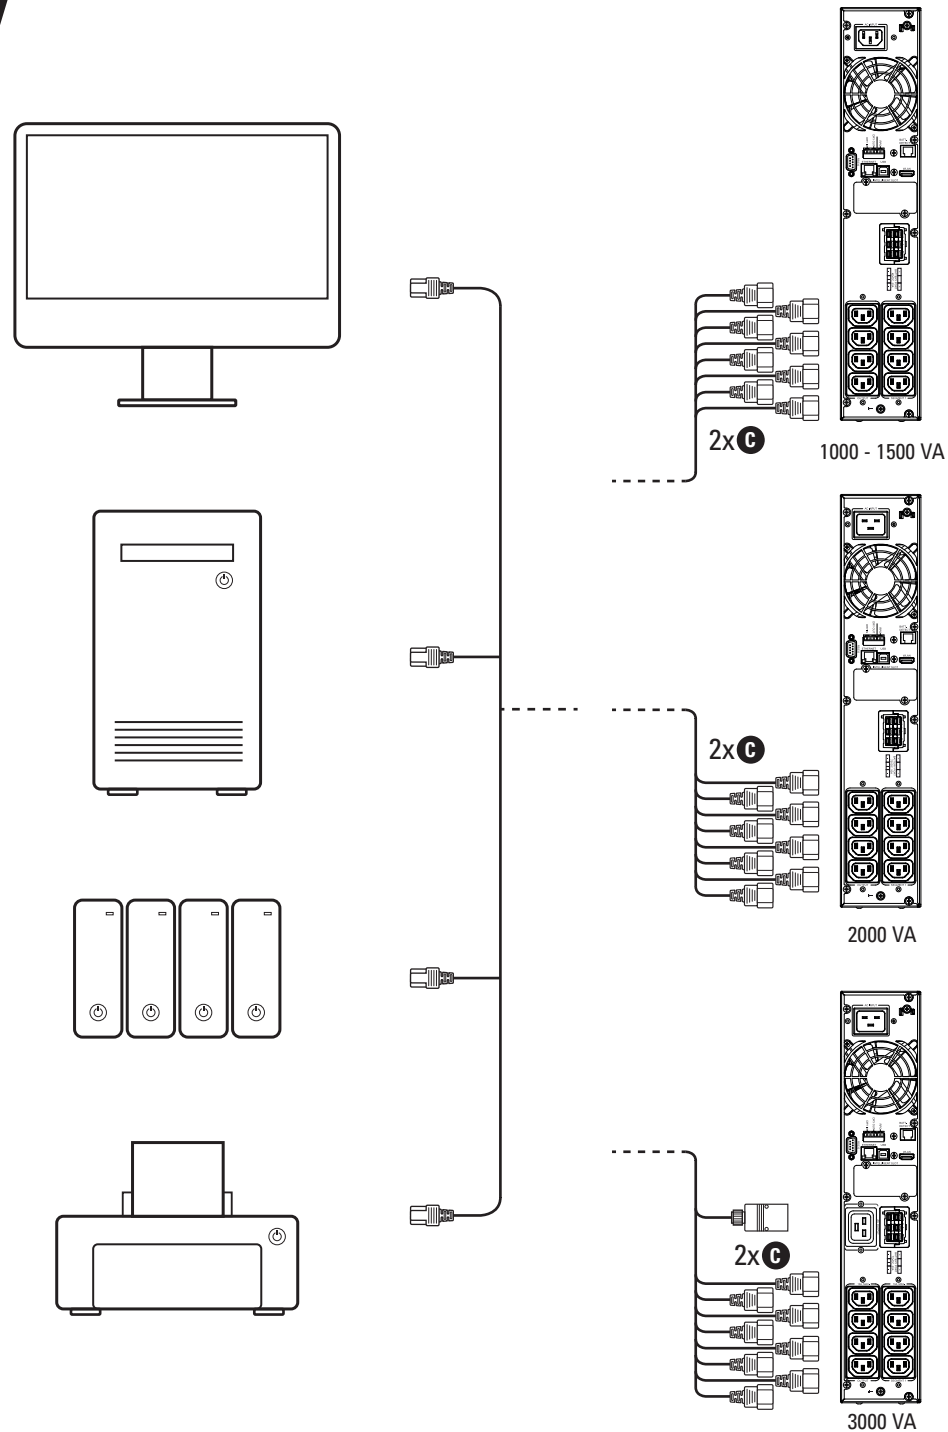

8

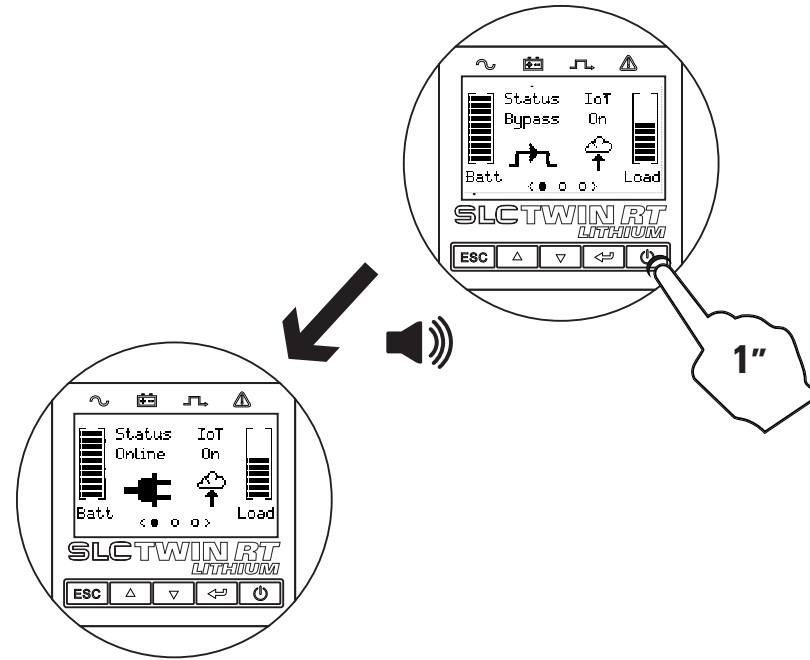

SLC TWIN RT³

QUICK START GUIDE
GUÍA RÁPIDA
GUIDE DE DÉMARRAGE RAPIDE
SCHNELLSTARTANLEITUNG
GUIA RÁPIDO
دليل البدء السريع


- SLC 1000 TWIN RT3 LION
- SLC 1500 TWIN RT3 LION
- SLC 2000 TWIN RT3 LION
- SLC 3000 TWIN RT3 LION



1



User's Manual




support.salicru.com



support.salicru.com

2

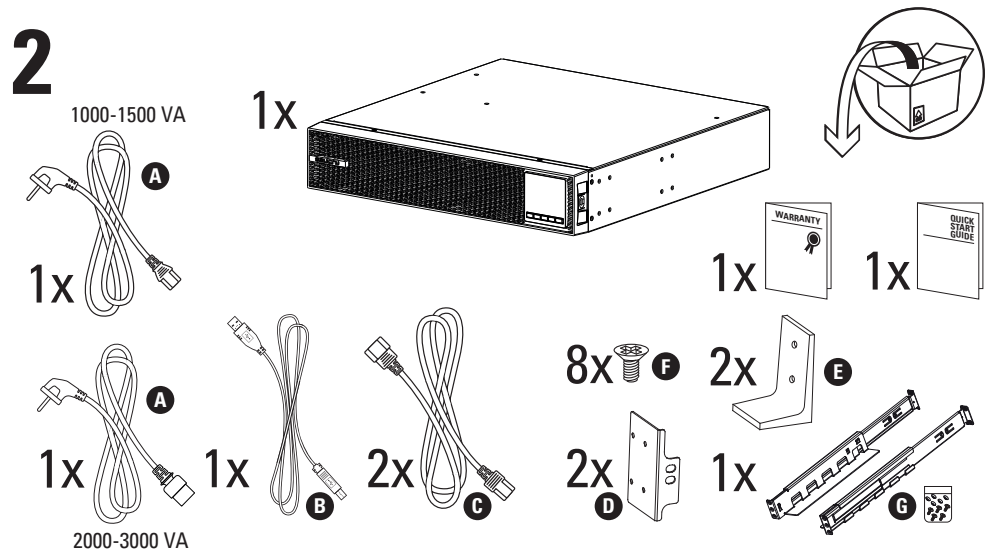

A perspective view of a 1U rack-mountable device. Two large white arrows indicate airflow from the front panel into the chassis, with a green dimension line labeled "20 cm." between them. Two more large white arrows indicate airflow exiting from the top of the chassis, also with a green dimension line labeled "20 cm." between them. The front panel features a mesh grille, a small display, and several indicator lights.



 220V / 230V / 240V
 50 Hz / 60 Hz

Diagram 6 illustrates the connection of the NIMBUS device to a wireless router and a PC. The NIMBUS device is shown with a power cable connected to a power source. A USB cable connects the NIMBUS device to a PC. A wireless router is connected to the NIMBUS device via a cable.

salicru