

SPS SAFE

Active electrical protectors



SPS SAFE: Multi-outlet power strips for powering and protecting equipment in the office and the home

Salicru's **SPS SAFE** series is a complete range of multi-outlet power strip active electrical protectors, ideal for protecting office and home electronics. Featuring basic 3 and 6-outlet models, the **SPS SAFE 3** and **SPS SAFE 6**, respectively, the **SPS SAFE 7**, model with 7 sockets, EMI/RFI filter and built-in cable collector, and the **SPS SAFE 5++** and **SPS SAFE Master** with 5 sockets and 2 USB chargers for charging electronic devices.

The **SPS SAFE Master** model also features, in addition to the EMI/RFI filter, a master/slave function to achieve significant savings by preventing load 'vampire' consumption in standby.

Applications: Superior electrical protection

Salicru's **SPS SAFE** series models are the best allies for office and home electronic protect: PC, printer, scanner, photocopier, router, hub/switch, external HDD, modem, phone, TV/LCD, home cinema, Hi-Fi, SAT, domotics, videoconsole, electric home appliances,...




salicru

Performances

- Next-generation active electrical protectors.
- Wide range of models (3, 5, 6 and 7 sockets).
- Models with built-in dual USB charger. ⁽¹⁾
- Schuko sockets, orientated for easy connection.
- Possibility of wall mounting. Surge control indicator.
- EMI/RFI filter for electrical noise reduction. ⁽²⁾
- On/off switch on all models.
- Financial warranty for protected devices. ⁽²⁾

(1) Safe 5+ and Safe Master

(2) Safe 7 and Safe Master

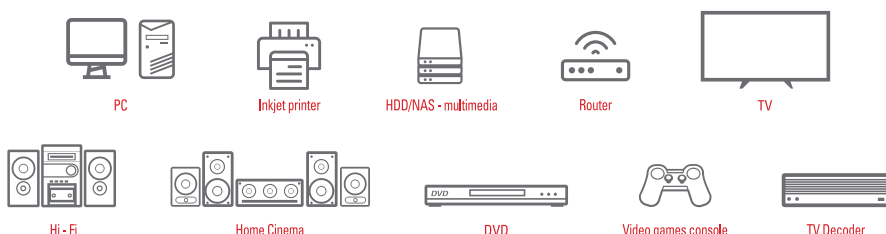

Technical specifications

MODEL		SPS SAFE 3	SPS SAFE 5+	SPS SAFE 6	SPS SAFE 7	SPS SAFE Master	
Rated current (A)		10					
Rated voltage / frequency		250 V AC / 50 Hz					
Socket type and quantity		3 × schuko	5 × schuko	6 × schuko	7 × schuko	5 × schuko	
USB charger		No	2 ports / 2,1 A / 5 VDC	No		2 ports / 1 A / 5 VDC	
Maximum power dissipation (F-N, N-T and F-T)		238	306	238	918		
Maximum peak current		8 kA	12 kA	8 kA	36 kA		
Maximum peak voltage		6000 V					
Response time		< 1 ns					
On/off switch		Yes					
Possibility of wall mounting		Yes					
Length of power cable		1.5			1.8		
Child protection in the sockets		Yes					
Sockets orientated for easy connection		Yes					
Surge control indicator		Yes					
Active electrical protection		Yes					
Electrical protection against overloads, power surges & lightning strikes		No		Yes		No	
Smart Master/Slave electrical protection		No					Yes
Includes cable-marking plus cable-tie		No	Yes	No	Yes		
MOV technology		Yes					
Cable wrap-organizer device		No			Yes	No	
Extra space for great dimension mains		No			Yes	No	
One AC outlet is always on		No					Yes
Financial warranty € (EU)		-			40000	60000	
STANDARDS	Safety	IEC-60884-1; EN-61643-11; EN-61643-21					
	Quality and environmental management	ISO 9001 & ISO 14001					
CODE		680BA000001	680BA000002	680BA000003	680BA000006	680BA000005	

Information subject to change without notice.

