


Steamer Rectangular shape

Street and area luminaires

Project :	Location :	Type :	Quantity :
Note :			



Elegant outlook luminaire design demand on aesthetic and functional application for large area or parking space where prestige lighting is required.

Luminaire Structure

- Low copper content corrosion resistant aluminum body.
- Stainless steel fasteners in grade 316.
- Durable silicone rubber gasket and clear toughened glass.
- The luminaire is treated with a chemical chromatized protection before powder coating, ensuring high corrosion resistance.
- The maximum wind load resistance is 160km/hrs.

Light Symbol




Area lighting with light distribution – Type-2

Shallow reach horizontal lighting distribution



Area lighting with light distribution – Type-3

Mid-range horizontal lighting distribution




Area lighting with light distribution – Type-4

Forward-throw lighting distribution



Area lighting with light distribution – Type-ME

Forward-throw lighting distribution



HEADQUARTERS EUROPE

Ligman Europe s.r.o.
VGP Park Ústí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co.,Ltd.
17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
Thailand | Tel : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
Victory Way | Crossways | Dartford DA2 6QD |
United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com

Technical amendments reserved.

Steamer Rectangular shape

Street and area luminaires

Project :	Location :	Type :	Quantity :
Note :			

Ordering guide sample

SE-90001 - T3 - W40 - DI - SC60 - A91060 - A21291

Type Colour Dim Type Spigot Accessory 1 Accessory 2

Spigot
SC60 – Dia. 60mm.

Colour Temperature
W30 – Warm white 3000K
W40 – Neutral white 4000K

Dimming Type
ND – Non dimmable
DI – 1-10V dimming
DA – DALI dimming

Product Code

Model No.	Lamp	System Power W	Lumen lm	Colour	EEC	Dimension					Weight kg
						L1	L2	W1	H1	H2	
SE-90001 - T2 - W30	9 LED	80	7360	3000K	A+	500	580	350	75	100	10.1
SE-90001 - T3 - W30	9 LED	80	7203	3000K	A+	500	580	350	75	100	10.1
SE-90001 - T4 - W30	9 LED	80	7338	3000K	A+	500	580	350	75	100	10.1
SE-90001 - T5 - W30	9 LED	80	7440	3000K	A+	500	580	350	75	100	10.1
SE-90001 - ME - W30	9 LED	80	7408	3000K	A+	500	580	350	75	100	10.1
SE-90001 - T2 - W40	9 LED	80	7913	4000K	A++	500	580	350	75	100	10.1
SE-90001 - T3 - W40	9 LED	80	7744	4000K	A++	500	580	350	75	100	10.1
SE-90001 - T4 - W40	9 LED	80	7889	4000K	A++	500	580	350	75	100	10.1
SE-90001 - T5 - W40	9 LED	80	7999	4000K	A++	500	580	350	75	100	10.1
SE-90001 - ME - W40	9 LED	80	7965	4000K	A++	500	580	350	75	100	10.1
SE-90011 - T2 - W30	18 LED	157	13031	3000K	A+	650	730	350	80	105	14.5
SE-90011 - T3 - W30	18 LED	157	12184	3000K	A+	650	730	350	80	105	14.5
SE-90011 - T4 - W30	18 LED	157	13087	3000K	A+	650	730	350	80	105	14.5
SE-90011 - T5 - W30	18 LED	157	14878	3000K	A+	650	730	350	80	105	14.5
SE-90011 - ME - W30	18 LED	157	12965	3000K	A+	650	730	350	80	105	14.5
SE-90011 - T2 - W40	18 LED	157	14011	4000K	A++	650	730	350	80	105	14.5
SE-90011 - T3 - W40	18 LED	157	13101	4000K	A++	650	730	350	80	105	14.5
SE-90011 - T4 - W40	18 LED	157	14072	4000K	A++	650	730	350	80	105	14.5
SE-90011 - T5 - W40	18 LED	157	15997	4000K	A++	650	730	350	80	105	14.5
SE-90011 - ME - W40	18 LED	157	13941	4000K	A++	650	730	350	80	105	14.5

Dimming Type

ND DI DA

Colour Code

- 01	- 02	- 03	- 05	- 06	
Black RAL 9011	Dark Grey RAL 7043	White RAL 9003	Matt Silver RAL 9006	Bronze RAL 6014	RESET

Accessory

Single arm mount (A91060)

Single arm mount (A91260)

Single adjustable 60° (A91660)

Single arm mount (A91460)

Double arm mount (A91160)

Double arm mount (A91360)

Double adjustable 60° (A91760)

Double arm mount (A91560)

Circuit breaker box IP44 (A21291)

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
VGP Park Ůstí nad Labem, P2 | Píestanov 120 | 40317 Píestanov |
Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co.,Ltd.
17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
Thailand | Tel. : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
Victory Way | Crossways | Dartford DA2 6QD |
United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com

Technical amendments reserved.

* Installation manual available online at www.ligman.com.
* Luminous flux and system power are rated from absolute photometry according to LM-79-08 standard for LED luminaire.
* Photometric diagram for standard non-accessory, please consult the factory in case accessory option.


Steamer Rectangular

Wall luminaires

Project :	Location :	Type :	Quantity :
Note :			



Surface wall-mounted contemporary area lighting family. Modern and powerful high-end, optimum-quality area lighting projectors.

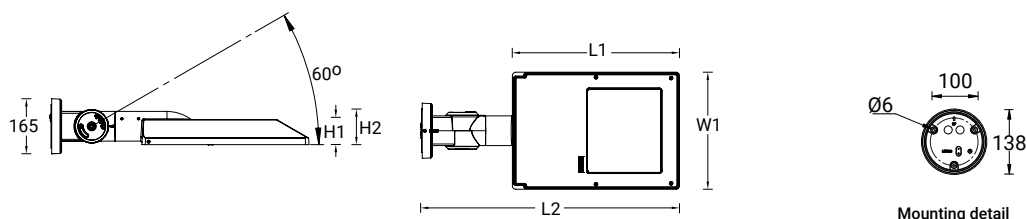

Luminaire Structure

- Low copper content die-cast aluminum housing and frame.
- Stainless steel fasteners in grade 316.
- High efficiency optical PMMA.
- Durable silicone rubber gasket and clear toughened glass.
- Single cable entry.
- Housing is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance.

Light Symbol



Area lighting with light distribution – Type-2

Shallow reach horizontal lighting distribution



Area lighting with light distribution – Type-3

Mid-range horizontal lighting distribution



Area lighting with light distribution – Type-4

Forward-throw lighting distribution



Area lighting with light distribution – Type-ME

Forward-throw lighting distribution

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
VGP Park Ůstí nad Labem, P2 | Píestanov 120 | 40317 Píestanov |
Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co.,Ltd.
17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
Thailand | Tel. : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
Victory Way | Crossways | Dartford DA2 6QD |
United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com

Technical amendments reserved.

Steamer Rectangular

Wall luminaires

Project :	Location :	Type :	Quantity :
Note :			

Ordering guide sample

SE-90001 - T4 - W30 - DI - A30160	Colour Temperature W30 – Warm white 3000K W40 – Neutral white 4000K	Dimming Type ND – Non dimmable DI – 1-10V dimming DA – DALI dimming
Type Colour Dim Type Accessory		

Product Code

Model No.	Lamp	System Power W	Lumen lm	Colour	EEC	Beam Angle / Type	Dimension					Weight kg
							L1	L2	W1	H1	H2	
SE-90001 - T2 - W30	9 LED	80	7360	3000K	A++	143°x48°	500	770	350	75	100	10.1
SE-90001 - T3 - W30	9 LED	80	7203	3000K	A++	142°x51°	500	770	350	75	100	10.1
SE-90001 - T4 - W30	9 LED	80	7338	3000K	A++	95°x84°	500	770	350	75	100	10.1
SE-90001 - T5 - W30	9 LED	80	7440	3000K	A++	88°x140°	500	770	350	75	100	10.1
SE-90001 - ME - W30	9 LED	80	7408	3000K	A++	135°x49°	500	770	350	75	100	10.1
SE-90001 - T2 - W40	9 LED	80	7913	4000K	A++	143°x48°	500	770	350	75	100	10.1
SE-90001 - T3 - W40	9 LED	80	7744	4000K	A++	142°x51°	500	770	350	75	100	10.1
SE-90001 - T4 - W40	9 LED	80	7889	4000K	A++	95°x84°	500	770	350	75	100	10.1
SE-90001 - T5 - W40	9 LED	80	7999	4000K	A++	88°x140°	500	770	350	75	100	10.1
SE-90001 - ME - W40	9 LED	80	7965	4000K	A++	135°x49°	500	770	350	75	100	10.1
SE-90011 - T2 - W30	18 LED	157	13031	3000K	A++	142°x42°	650	920	350	80	105	14.5
SE-90011 - T3 - W30	18 LED	157	12184	3000K	A++	141°x47°	650	920	350	80	105	14.5
SE-90011 - T4 - W30	18 LED	157	13087	3000K	A++	95°x84°	650	920	350	80	105	14.5
SE-90011 - T5 - W30	18 LED	157	14878	3000K	A++	88°x140°	650	920	350	80	105	14.5
SE-90011 - ME - W30	18 LED	157	12965	3000K	A++	136°x39°	650	920	350	80	105	14.5
SE-90011 - T2 - W40	18 LED	157	14011	4000K	A++	142°x42°	650	920	350	80	105	14.5
SE-90011 - T3 - W40	18 LED	157	13101	4000K	A++	141°x47°	650	920	350	80	105	14.5
SE-90011 - T4 - W40	18 LED	157	14072	4000K	A++	95°x84°	650	920	350	80	105	14.5
SE-90011 - T5 - W40	18 LED	157	15997	4000K	A++	88°x140°	650	920	350	80	105	14.5
SE-90011 - ME - W40	18 LED	157	13941	4000K	A++	136°x39°	650	920	350	80	105	14.5

Dimming Type

ND DI DA

Accessory



Arm wall mount adjustable 60° (A30160)

Colour Code

- 01	- 02	- 03	- 05	- 06	
Black RAL 9011	Dark Grey RAL 7043	White RAL 9003	Matt Silver RAL 9006	Bronze RAL 6014	RESET

* Installation manual available online at www.ligman.com.

* Luminous flux and system power are rated from absolute photometry according to LM-79-08 standard for LED luminaire.
* Photometric diagram for standard non-accessory, please consult the factory in case accessory option.

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
VGP Park Ůstí nad Labem, P2 | Přestanov 120 | 40317 Přestanov |
Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co.,Ltd.
17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
Thailand | Tel : +66 (2) 7339140 | info@ligman.com

Ligman Ltd.
Victory Way | Crossways | Dartford DA2 6QD |
United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com


Technical amendments reserved.

Steamer Rectangular

Wall luminaires

Project :	Location :	Type :	Quantity :
Note :			

Photometric

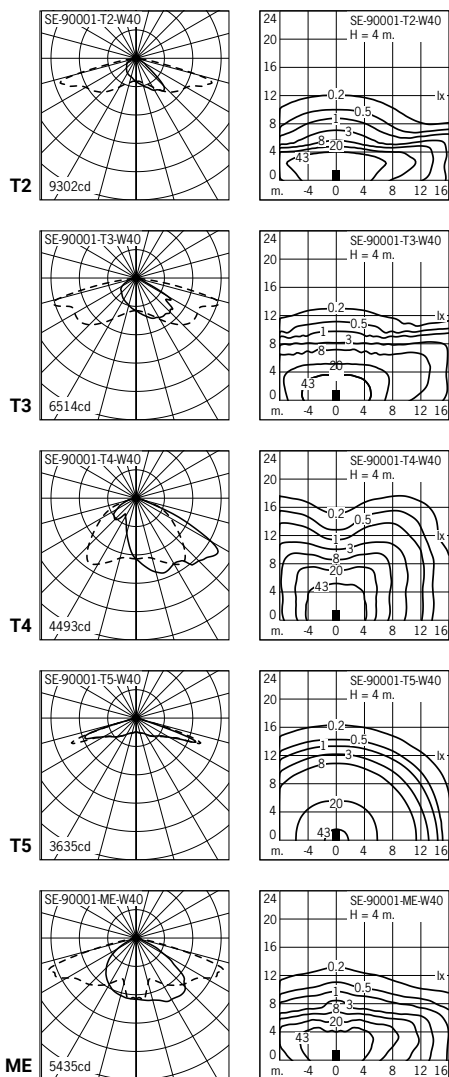

HEADQUARTERS EUROPE

Ligman Europe s.r.o.
VGP Park Ůstí nad Labem, P2 | Pøestanov 120 | 40317 Pøestanov |
Czech Republic | Tel. +420 477 07 1500 | sales.cz@ligman.com
www.ligman.com

HEADQUARTERS THAILAND

Ligman Lighting Co.,Ltd.
17/2 | Moo 4 | Monthong | Bangnampreaw | Chachoengsao 24150 |
Thailand | Tel : +66 (2) 7339140 | info@ligman.com

Technical amendments reserved.

Ligman Ltd.
Victory Way | Crossways | Dartford DA2 6QD |
United Kingdom | Tel +66 2 733 9140 | Fax +66 2 733 9153 |
sales.uk@ligman.com