


Cluster projectors - ODESSA (2) (LCO-20067)**Product description**

2 x OD-50011 projectors

**Luminaire Structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency optical reflector


Optic

Cluster projectors - ODESSA (2) (LCO-20067)

Technical information

Light source	2 x 1 COB	Optic value	15°, 24°, 47°, 66°	Weight	19.5 kg
Power	70 W	CCT / CRI	3000K CRI80, 4000K CRI80	EPA (m2)	0.189
Lumen	5924 - 7090 lm	Bug	B3-U0-G0	MacAdam Ellipse	3 SDCM
Efficacy	85 - 101 lm/W	ULR	<1%	Lifetime L90B10 (hours)	> 55,000
Input voltage	220-240V 50/60Hz	ULOR	<1%	VARIANTS	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Optic	N, M, W, VW	CIE flux code n°3	100, 99		

LCO-20067

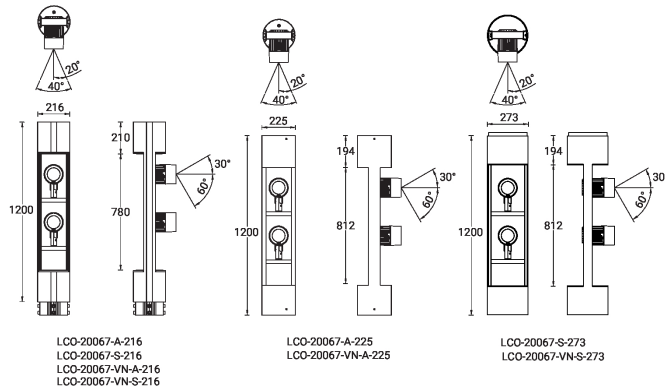

Cluster projectors - ODESSA (2) (LCO-20067)**Accessory**



Anti-glare louvre
A80231



Anti-glare visor
A80131



Linear spread lens
A80114

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.