
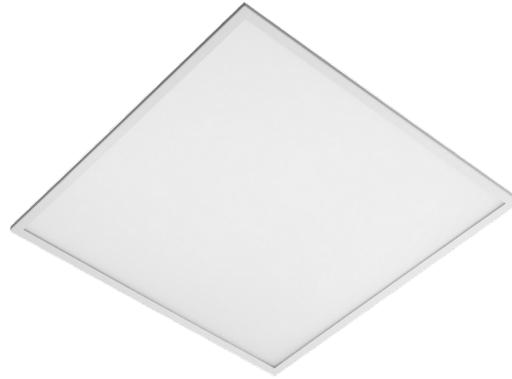



**ARUBA 1 (ARU-80001)****Product description**

600x600 mm

**Luminaire Structure**

- Formed sheet steel body with powder coating
- White painted metal sheet
- UV & flame resistant, chemical & salt stable PVC
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Micro prismatic PMMA diffuser for better glare control
- Remote driver (included)
- Recessed and surface mounted options
- Accessories: Aluminium frame for surface installation & Aluminium frame for recessed installation of fitting into gypsum plasterboard

**Optic****P****Product colour**

03 - White (RAL 9003)

**ARUBA 1 (ARU-80001)**


**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	2 x 66 LED
<b>Power</b>	28 W
<b>Lumen</b>	3000 lm
<b>Efficacy</b>	107 lm/W
<b>Driver option</b>	Remote driver (included)

<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	220-240 V 50/60 Hz
<b>Optic</b>	P
<b>Optic value</b>	Micro-prismatic
<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80
<b>Dimming type</b>	On/Off, DALI

<b>Product colours</b>	White
<b>Weight</b>	4.0 kg
<b>Operating temperature</b>	-20 °C to 40 °C
<b>Lens / Reflector / Optic</b>	Micro prismatic PMMA diffuser for better glare control

ARU-80001

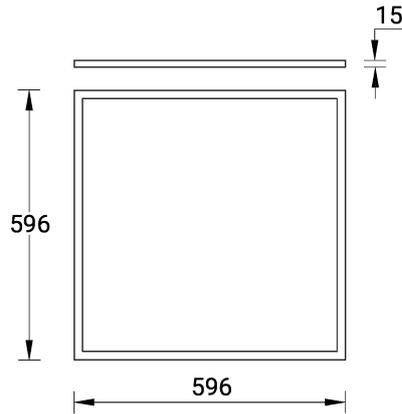

**ARUBA 1 (ARU-80001)****Accessory**

Frame for recessed installation  
of fittings into gypsum  
plasterboard ceiling SQUARE  
(White)  
**A83081**



Frame for surface installation  
SQUARE (White)  
**A83281**



Wireless bluetooth converter  
**A90291**



Xpress wireless switch  
**A90591**



DALI Control System  
**Control-DALI**