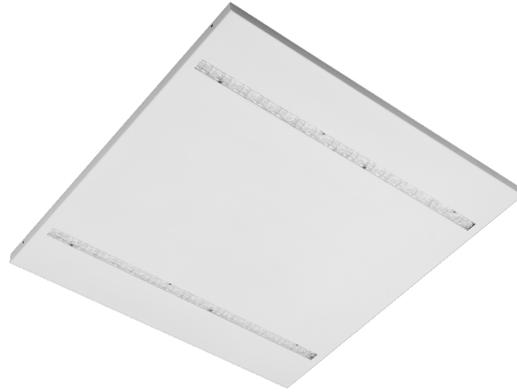




VICTORIA 3 (VIC-80022)**Product description**

Optic arrangement type 3

**Luminaire Structure**

- Formed sheet steel body with powder coating
- White painted metal sheet
- One size: 600x600 mm
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Integral control gear
- Recessed and surface mounted options
- Accessories: Aluminium frame for surface installation & Aluminium frame for recessed installation of fitting into gypsum plasterboard

Optic**Product colour**


03 - White (RAL 9003)


VICTORIA 3 (VIC-80022)

Technical information

Material	Aluminium	Input voltage	220-240 V 50/60 Hz	CIE flux code n°3	99
Light source	2 x 48 LED	Optic	W, VW	Dimming type	On/Off, 1-10V, DALI
Power	26 W	Optic value	60°, 90°	Product colours	White
Lumen	3800 lm	CCT / CRI	3000K CRI90, 4000K CRI90	Weight	2.0 kg
Efficacy	146 lm/W	Bug	B2-U1-G1, B3-U1-G0	Operating temperature	-20 °C to 40 °C
Driver option	Integral control gear	ULR	0%	Variants (1-10V)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Driver	Constant current (CC)	ULOR	0%		

VIC-80022

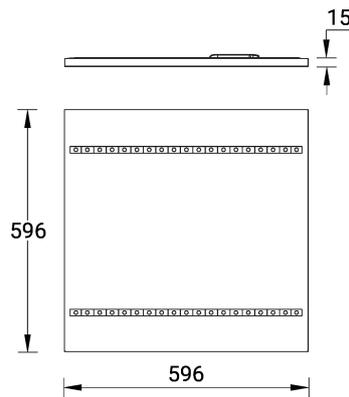

VICTORIA 3 (VIC-80022)**Accessory**

Frame for recessed installation
of fittings into gypsum
plasterboard ceiling SQUARE
(White)
A83081



Frame for surface installation
SQUARE (White)
A83281



Wireless bluetooth converter
A90291



Xpress wireless switch
A90591



DALI Control System
Control-DALI