

AUBAINE 1 (AUB-20001)



Product description

1 side - Supplied with specific 6.155 m square, straight galvanised steel pole: SPC160150-AUB-20001-9030, SPC160150-AUB-20001-9040 600W



Luminaire Structure

- Formed sheet aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)

- Durable silicone rubber gasket
- Clear toughened glass
- Opal toughened glass diffuser for around the pole
- Integral control gear
- Maximum wind load resistance is 100 km/h

- Surge protection 10kV
- Square, straight galvanised steel pole
- Aluminum plates cover all 4 sides of the post at the bottom

Optic




T2 T3 T4

Product colour



01 - Black (RAL 9011) 02 - Dark Grey (RAL 7043) 03 - White (RAL 9003) 04 - Matt Silver (RAL 9006) 05 - Matt Silver (RAL 9006) 06 - Bronze (RAL 6014)

Special finishes upon request



SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban



SW01 - Oak - Woodland SW02 - Walnut - Woodland SW03 - Pine - Woodland


AUBAINE 1 (AUB-20001)


Technical information

Material	Aluminium
Light source	24 LED - LED tape
Power	54 W
Lumen	5501 - 6193 lm
Efficacy	102 - 115 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	T2, T3, T4

Optic value	140°x47°, 134°x68°, 92°x78°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B1-U0-G1
ULR	<1%
ULOR	<1%
CIE flux code n°3	98
Dimming type	On/Off, 1-10V, DALI
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	220.0 kg

EPA (m2)	0.100
Cable	One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	Clear toughened glass, Opal toughened glass diffuser for around the pole
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 90,000
Lifetime L80B10 (hours)	> 90,000
Lifetime L80B50 (hours)	> 90,000
Variants (DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

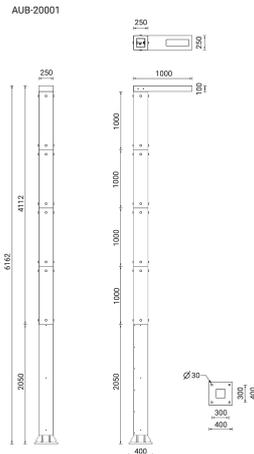

AUBAINE 1 (AUB-20001)**Accessory**

Anchor bolt
A23491



DALI Control System
Control-DALI

Pole (required)

3000K - 600 W - 6.155 m -
Square, straight galvanised steel
with frosted glass pole for
AUBAINE
SPC160150-AUB-20001-9030



4000K - 600 W - 6.155 m -
Square, straight galvanised steel
with frosted glass pole for
AUBAINE
SPC160150-AUB-20001-9040