

**LIGHTALK 14** (LA-30035) (Version 1)



**Product description**

Without remote driver - Constant voltage (CV) 24 V - 1205 mm - Class III




microPrim™

**Luminaire Structure**

- Die-cast aluminium end-caps
- Extruded aluminium housing and sheet aluminium front frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (not included)
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- 24 VDC input, DMX/RDM address with stable signal


**Optic**

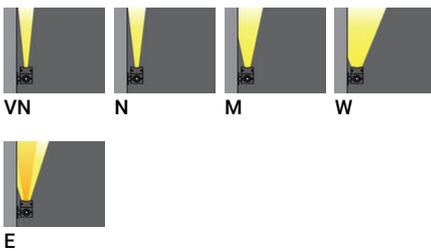

**Product colour**



**Special finishes upon request**

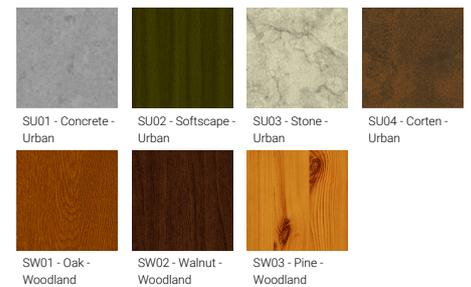

**LIGHTALK 14** (LA-30035) (Version 1)


**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	36 LED
<b>Power</b>	51 W
<b>Lumen</b>	3871 - 4975 lm
<b>Efficacy</b>	76 - 98 lm/W
<b>Driver option</b>	Remote driver (not included)
<b>Driver</b>	Constant voltage (CV)

<b>Input voltage</b>	24 VDC
<b>Optic</b>	VN, N, M, W, E
<b>Optic value</b>	13°, 15°, 25°, 43°, 22° x 36°
<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80
<b>Bug</b>	B2-U1-G0, B3-U1-G0
<b>ULR</b>	100%
<b>ULOR</b>	100%

<b>Dimming type</b>	On/Off
<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	4.8 kg
<b>Operating temperature</b>	-20 °C to 40 °C
<b>Cable</b>	Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable
<b>Through wiring</b>	Two cable entries for through wiring
<b>Lens / Reflector / Optic</b>	Clear toughened glass

**LA-30035**

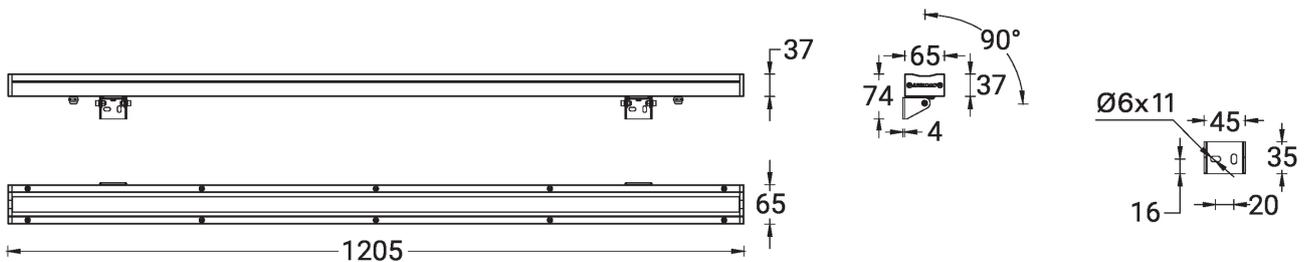


**LIGHTALK 14 (LA-30035) (Version 1)**

**Accessory**




Cable - Connector IP67 Female 2 Pin Power - 1000 mm  
**A65491-001**

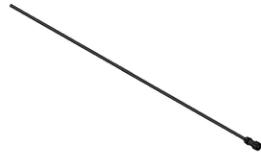

Cable - Connector IP67 Female 2 Pin Power - 5000 mm  
**A65491-005**



Cable - Connector IP67 Female + Male 2 Pin Power - 1000 mm  
**A65591-001**

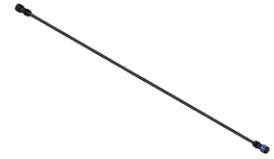

Cable - Connector IP67 Female + Male 2 Pin Power - 5000 mm  
**A65591-005**



Connector IP67 Female 2 Pin Power  
**A68191**



Connector IP67 Male 2 Pin Power  
**A68291**



End cap - Connector IP67 Female 2 Pin and 3 Pin Power  
**A67991**



End cap - Connector IP67 Male 2 Pin and 3 Pin Power  
**A68091**



Driver (CV) - On/Off - 60 W - IP67 - 24 V  
**A34591-ND**



Driver (CV) - On/Off - 100 W - IP67 - 24 V  
**A34791-ND**



Driver (CV) - On/Off - 150 W - IP67 - 24 V  
**A34891-ND**



Driver (CV) - On/Off - 200 W - IP67 - 24 V  
**A34991-ND**



Driver (CV) - On/Off - 350 W - IP67 - 24 V  
**A35091-ND**



75 mm extend arm mounting  
**A30891**



150 mm extend arm mounting  
**A30991**



300 mm extend arm mounting  
**A31091**

**LIGHTALK 14** (LA-30035) (Version 1)

---

450 mm extend arm mounting  
**A31191**

---