

**MATRIX 10 (MT-31409)**



**Product description**

Optic 2 sides L (2L-90) - Without lamp



microPrim™

**Luminaire Structure**


- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible
- MATRIX luminaires with uplight and colder than 3000K CCT do not meet the IDA certification requirements

**Optic**




L

**Product colour**

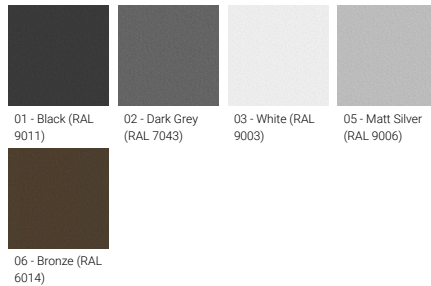

**Special finishes upon request**

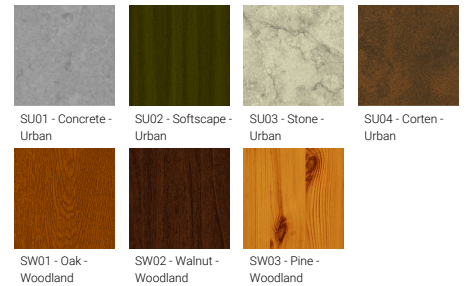


**MATRIX 10 (MT-31409)**

**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	HIT-TC-CE
<b>Power</b>	35 W
<b>Lumen</b>	240 lm
<b>Efficacy</b>	7 lm/W
<b>Driver option</b>	Integral control gear

<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	220-240 V 50/60 Hz
<b>Optic</b>	L
<b>Optic value</b>	5°
<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80
<b>Dimming type</b>	On/Off

<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	2.1 kg
<b>Operating temperature</b>	-20 °C to 40 °C
<b>Through wiring</b>	Single cable entry
<b>Lens / Reflector / Optic</b>	Clear toughened glass



**MATRIX 10** (MT-31409)**Accessory**

---



---

Surface mounting box for easy  
cabling (MATRIX 10)  
**SCE-MATRIX-10**

---