

PALETTA 4 (PA-31953)



Product description

345x190 mm - Tunable White




microPrim™

Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

Optic




G

Product colour



Special finishes upon request

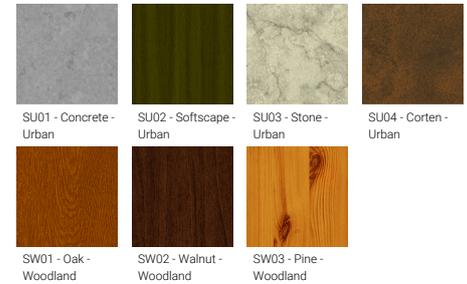


PALETTA 4 (PA-31953)

Technical information

Material	Aluminium	Input voltage	220-240 V 50/60 Hz	CIE flux code n°3	90
Light source	192 LED	Optic	G	Dimming type	DALI
Power	16 W	Optic value	134°x122°		Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Lumen	1445 lm	CCT / CRI	TW (2700K - 6500K)	Product colours	
Efficacy	90 lm/W	Bug	B1-U3-G1	Weight	3.1 kg
Driver option	Integral control gear	ULR	7.5%	Through wiring	Two cable entries for through wiring
Driver	Constant current (CC)	ULOR	7.5%	Lens / Reflector / Optic	Opal UV-stabilised polycarbonate diffuser
				Variants (DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

PA-31953

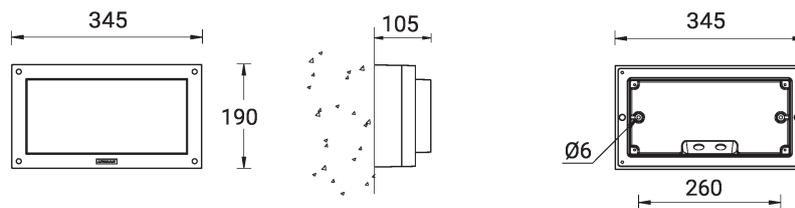

PALETTA 4 (PA-31953)**Accessory**



Surface mounting box for easy
cabling (PALETTA 4)
SCE-PALETTA-4
