

PITTSBURGH 6 (PIB-30026)



Product description

Large - RGBW




microPrim™


Luminaire Structure

- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Thermal heat dissipation body
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency polycarbonate lens
- Integral control gear
- Surge protection 10kV


Optic

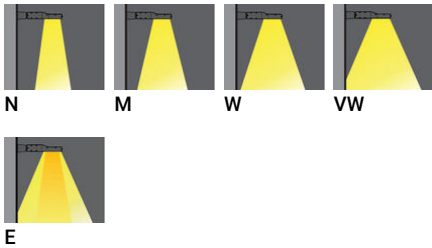

Product colour

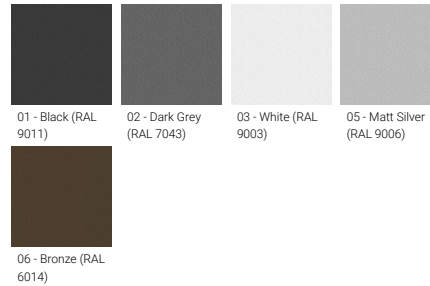

Special finishes upon request

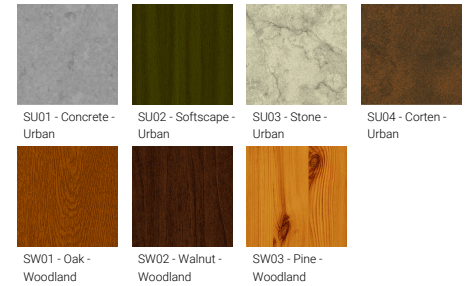

PITTSBURGH 6 (PIB-30026)


Technical information

| | |
|----------------------|-----------------------|
| Material | Aluminium |
| Light source | 3 x 36 LED |
| Power | 217 W |
| Lumen | 11815 - 15331 lm |
| Efficacy | 54 - 71 lm/W |
| Driver option | Integral control gear |
| Driver | Constant current (CC) |
| Input voltage | 220-240 V 50/60 Hz |

| | |
|--------------------------|------------------------------|
| Optic | N, M, W, VW, E |
| Optic value | 8°, 14°, 29°, 72°, 43°x9° |
| CCT / CRI | RGBW30, RGBW40 |
| Bug | B4-U0-G0, B5-U0-G0, B5-U0-G1 |
| ULR | <1% |
| ULOR | <1% |
| CIE flux code n°3 | 100 |
| Dimming type | DMX/RDM |

| | |
|---------------------------------|--|
| Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Weight | 16.0 kg |
| Operating temperature | -20 °C to 40 °C |
| Through wiring | Single cable entry |
| Lens / Reflector / Optic | Clear toughened glass, High-efficiency polycarbonate lens |
| Variants (DMX/RDM) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

PIB-30026

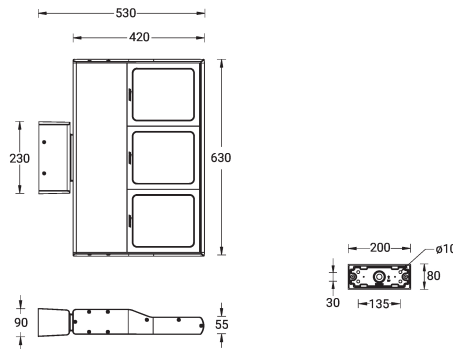

Accessory



DMX/RDM Control System
Control-DMX-RDM
