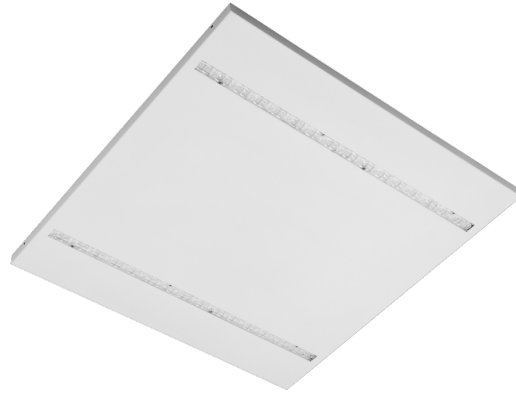




**VICTORIA 3** (VIC-80022)**Product description**

Optic arrangement type 3

**Luminaire Structure**

- Formed sheet steel body with powder coating
- White painted metal sheet
- One size: 600x600 mm
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Integral control gear
- Recessed and surface mounted options
- Accessories: Aluminium frame for surface installation & Aluminium frame for recessed installation of fitting into gypsum plasterboard

**Optic****Product colour**


03 - White (RAL 9003)


**VICTORIA 3 (VIC-80022)**

**Technical information**

<b>Material</b>	Aluminium	<b>Input voltage</b>	220-240 V 50/60 Hz	<b>CIE flux code n°3</b>	99
<b>Light source</b>	2 x 48 LED	<b>Optic</b>	W, VW	<b>Dimming type</b>	On/Off, 1-10V, DALI
<b>Power</b>	26 W	<b>Optic value</b>	60°, 90°	<b>Product colours</b>	White
<b>Lumen</b>	3800 lm	<b>CCT / CRI</b>	3000K CRI90, 4000K CRI90	<b>Weight</b>	2.0 kg
<b>Efficacy</b>	146 lm/W	<b>Bug</b>	B2-U1-G1, B3-U1-G0	<b>Operating temperature</b>	-20 °C to 40 °C
<b>Driver option</b>	Integral control gear	<b>ULR</b>	0%	<b>Variants (1-10V)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
<b>Driver</b>	Constant current (CC)	<b>ULOR</b>	0%		

VIC-80022

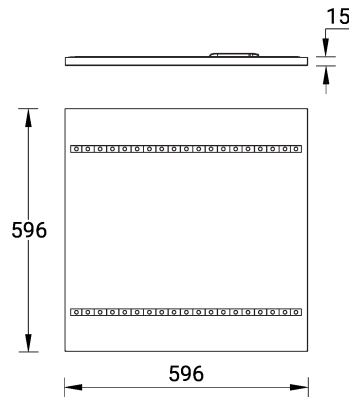

**VICTORIA 3** (VIC-80022)**Accessory**

Frame for recessed installation  
of fittings into gypsum  
plasterboard ceiling SQUARE  
(White)  
**A83081**



Frame for surface installation  
SQUARE (White)  
**A83281**



Wireless bluetooth converter  
**A90291**



Xpress wireless switch  
**A90591**



DALI Control System  
**Control-DALI**