

VANCOUVER 53 (VA-20242-LC)



Product description

240x240 mm - 3700 mm - Decorative pattern type 2 - LIGHTCONNECT™



LIGHT CONNECT™ microPrim™

Luminaire Structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear
- Maximum wind load resistance is 160 km/h
- Surge protection 10kV
- VANCOUVER luminaires with projectors on top and colder than 3000K CCT do not meet the IDA certification requirements

Optic




G

Product colour




Special finishes upon request

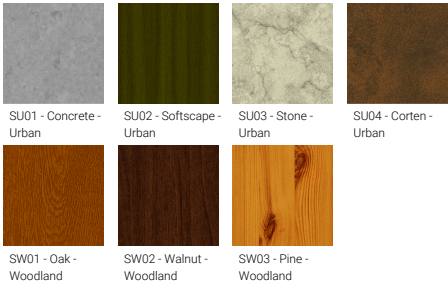

VANCOUVER 53 (VA-20242-LC)

Technical information

Material	Aluminium	Optic	G	Cable	One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
Light source	1 COB	Optic value	134°	Through wiring	Single cable entry
Power	40 W	CCT / CRI	3000K CRI80, 4000K CRI80	Lens / Reflector / Optic	High-efficiency optical reflector, Clear toughened glass
Lumen	2586 - 2781 lm	Dimming type	On/Off, 1-10V, DALI	MacAdam Ellipse	3 SDCM
Efficacy	65 - 70 lm/W	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L90B10 (hours)	> 50,700
Driver option	Integral control gear			Lifetime L80B10 (hours)	> 63,500
Driver	Constant current (CC)			Lifetime L80B50 (hours)	> 63,500
Input voltage	220-240 V 50/60 Hz	Weight	55.8 kg	Variants (1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
		Operating temperature	-20 °C to 40 °C		
		EPA (m2)	0.888		

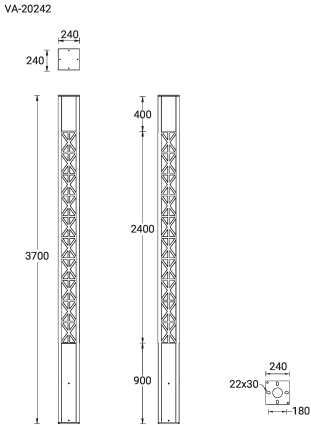

VANCOUVER 53 (VA-20242-LC)

Accessory

 Zhaga Book 18 socket (Up) A90991-U	 NEMA 7 socket A90891	 DALI Control System Control-DALI	 Smart Pole Accessories Accs-Smart-Pole
---	--	---	--