

BENTON 12 (BE-20041)



Product description

Ø160 mm - Supplied with specific 2 m cylindrical, straight aluminium pole: APD120160-BE-20041



microPrim™

Luminaire Structure


- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency polycarbonate lens
- Integral control gear
- Maximum wind load resistance is 160 km/h
- Surge protection 10kV
- BENTON luminaires with projectors on top and colder than 3000K CCT do not meet the IDA certification requirements
- BENTON 3 and 11 are not available in European Union

Optic




G

Product colour

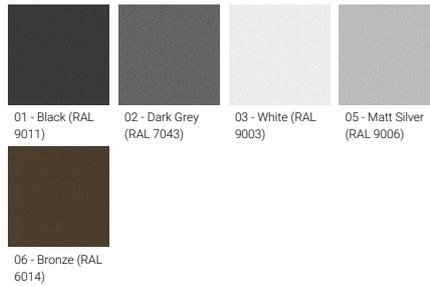

Special finishes upon request

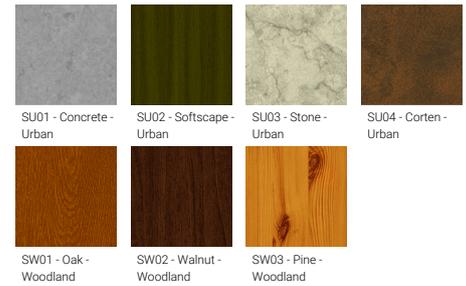


BENTON 12 (BE-20041)

Technical information

Material	Aluminium
Light source	1 COB
Power	20 W
Lumen	987 - 1038 lm
Efficacy	49 - 52 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	G

Optic value	126°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B1-U1-G1
ULR	<1%
ULOR	<1%
CIE flux code n°3	87
Dimming type	On/Off, 1-10V, DALI
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	20.7 kg

Operating temperature	-20 °C to 40 °C
EPA (m2)	0.560
Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	Clear toughened glass, High-efficiency polycarbonate lens
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 61,000
Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

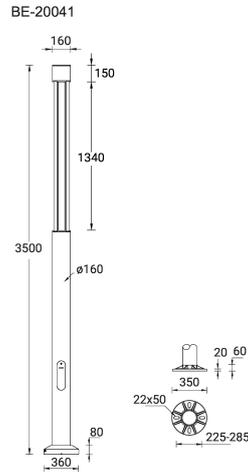

BENTON 12 (BE-20041)**Accessory**



Circuit breaker box IP44
A21291



Root mount kit
A20691



DALI Control System
Control-DALI

Pole (required)



2 m - Cylindrical, straight
aluminium pole for BENTON
APD120160-BE-20041