

**LADOR 47 (LD-50251) (Version 1)**



**Product description**

Bracket mounted - With remote driver IP-rated - Constant voltage (CV) 24 V - 82x82 mm - Class III - RGBW




microPrim™


**Luminaire Structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Thermal heat dissipation body
- Adjustable: Tilt 80° (Up) & 40° (Down), Rotation 350°
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Remote driver (included)

**Optic**

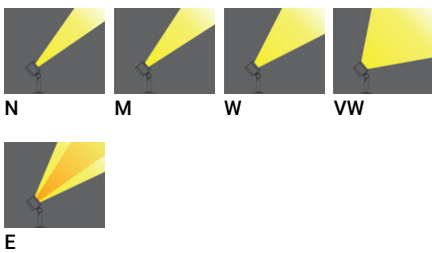

**Product colour**

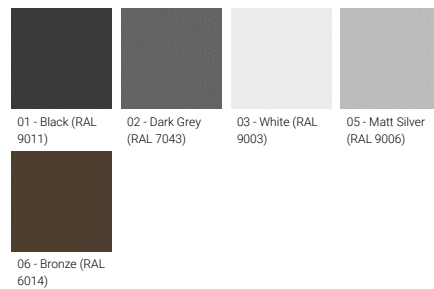

**Special finishes upon request**



**LADOR 47** (LD-50251) (Version 1)


**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	4 LED
<b>Power</b>	10 W
<b>Lumen</b>	406 - 520 lm
<b>Efficacy</b>	41 - 52 lm/W
<b>Driver option</b>	Remote driver (included)
<b>Driver</b>	Constant voltage (CV)
<b>Input voltage</b>	24 VDC

<b>Optic</b>	N, M, W, VW, E
<b>Optic value</b>	8°, 17°, 26°, 65°, 43°x11°
<b>CCT / CRI</b>	RGBW30, RGBW40
<b>Bug</b>	B1-U0-G0
<b>ULR</b>	<1%
<b>ULOR</b>	<1%
<b>CIE flux code n°3</b>	100
<b>Dimming type</b>	DMX, DMX/RDM

<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	2.0 kg
<b>Operating temperature</b>	-20 °C to 40 °C
<b>EPA (m2)</b>	0.054
<b>Through wiring</b>	Single cable entry
<b>Lens / Reflector / Optic</b>	High-efficiency PMMA lens, Clear toughened glass
<b>Variants (DMX/RDM)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

LD-50251

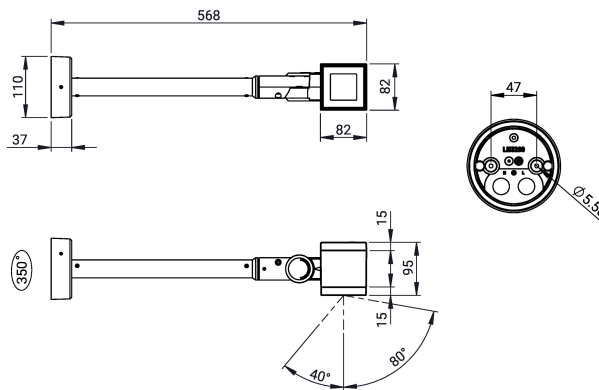

**LADOR 47** (LD-50251) (Version 1)**Accessory**


DMX Control System  
**Control-DMX**



DMX/RDM Control System  
**Control-DMX-RDM**



Linear spread lens  
**A51214**



Honeycomb louvre  
**A51921**

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.