

ODESSA 7 (OD-50091)



Product description

Bracket mounted projector – Ø105 mm



microPrim™

Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Adjustable: Tilt 80° (Up) & 40° (Down), Rotation 350°
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear

Optic



VN

Product colour



Special finishes upon request




ODESSA 7 (OD-50091)

Technical information

| | |
|----------------------|-----------------------|
| Material | Aluminium |
| Light source | 1 LED |
| Power | 11 W |
| Lumen | 744 - 816 lm |
| Efficacy | 68 - 74 lm/W |
| Driver option | Integral control gear |
| Driver | Constant current (CC) |
| Input voltage | 220-240 V 50/60 Hz |
| Optic | VN |

| | |
|--------------------------|--|
| Optic value | 8° |
| CCT / CRI | 2700K CRI80, 3000K CRI80, 4000K CRI80 |
| Bug | B1-U0-G0 |
| ULR | <1% |
| ULOR | <1% |
| CIE flux code n°3 | 100 |
| Dimming type | On/Off, 1-10V, DALI |
| Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Weight | 3.2 kg |

| | |
|---------------------------------------|---|
| Operating temperature | -20 °C to 40 °C |
| EPA (m2) | 0.043 |
| Through wiring | Single cable entry |
| Lens / Reflector / Optic | High-efficiency PMMA lens, Clear toughened glass |
| MacAdam Ellipse | 3 SDCM |
| Lifetime L90B10 (hours) | > 109,000 |
| Lifetime L80B10 (hours) | > 109,000 |
| Lifetime L80B50 (hours) | > 109,000 |
| Variants (On/Off, 1-10V, DALI) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

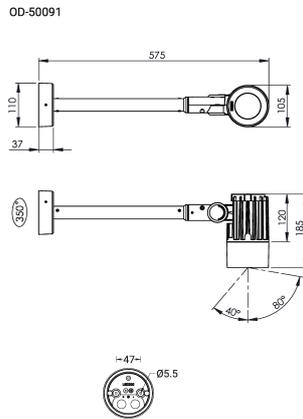

Accessory



Anti-glare visor
A80331



Honeycomb louvre
A80121



Linear spread lens
A80214



DALI Control System
Control-DALI

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.