

PITTSBURGH 4 (PIB-30004)



Product description

Small - RGBW




microPrim™


Luminaire Structure

- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Thermal heat dissipation body
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency polycarbonate lens
- Integral control gear
- Surge protection 10kV


Optic

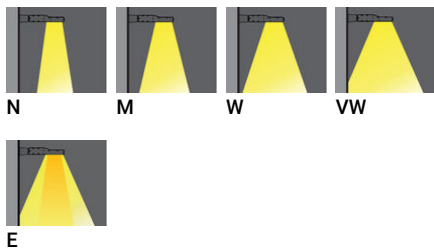

Product colour

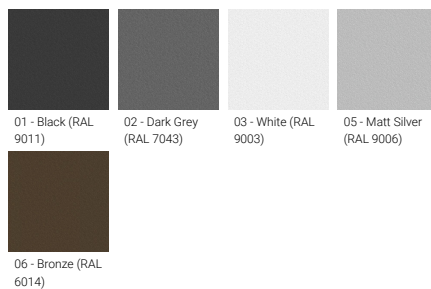

Special finishes upon request

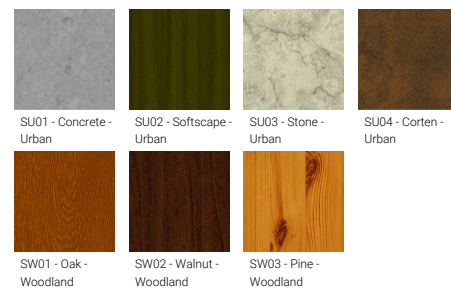


PITTSBURGH 4 (PIB-30004)

Technical information

Material	Aluminium	Driver	Constant current (CC)	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	36 LED	Input voltage	220-240 V 50/60 Hz	Weight	5.5 kg
Power	40 W	Optic	N, M, W, VW, E	Operating temperature	-20 °C to 40 °C
Lumen	1981 - 2535 lm	Optic value	9°, 16°, 33°, 64°, 43°x10°	Through wiring	Single cable entry
Efficacy	50 - 63 lm/W	CCT / CRI	RGBW30, RGBW40	Lens / Reflector / Optic	Clear toughened glass, High-efficiency polycarbonate lens
Driver option	Integral control gear	Dimming type	DMX/RDM		

PIB-30004

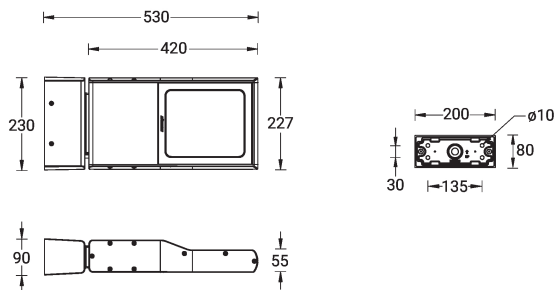

PITTSBURGH 4 (PIB-30004)**Accessory**



DMX/RDM Control System
Control-DMX-RDM
