


**TAURAS 3 (TU-20396-1)**



**Product description**

Ø160 mm - Supplied with specific 2.5 m cylindrical, straight aluminium pole: APD125160-TU-20396-1



microPrim™

**Luminaire Structure**


- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Mat finishing aluminium reflector
- Clear UV-stabilised polycarbonate diffuser
- Integral control gear
- Maximum wind load resistance is 160 km/h
- Surge protection 10kV

**Optic**




G

**Product colour**

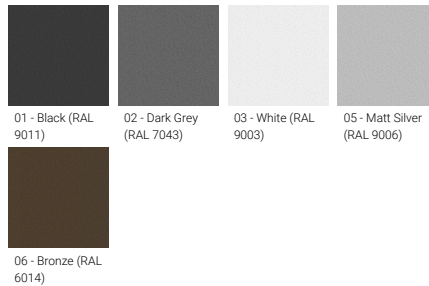

**Special finishes upon request**

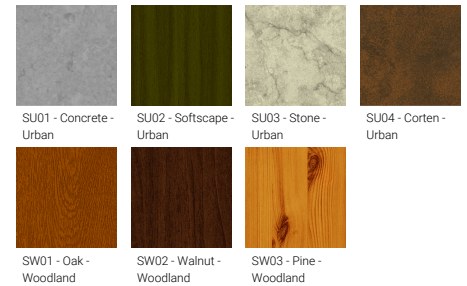


**TAURAS 3 (TU-20396-1)**

**Technical information**

|                      |                       |
|----------------------|-----------------------|
| <b>Material</b>      | Aluminium             |
| <b>Light source</b>  | 1 COB                 |
| <b>Power</b>         | 41 W                  |
| <b>Lumen</b>         | 1082 - 1096 lm        |
| <b>Efficacy</b>      | 26 - 27 lm/W          |
| <b>Driver option</b> | Integral control gear |
| <b>Driver</b>        | Constant current (CC) |
| <b>Input voltage</b> | 220-240 V 50/60 Hz    |

|                              |  |
|------------------------------|--|
| <b>Optic</b>                 | G  |
| <b>Optic value</b>           | 172°   |
| <b>CCT / CRI</b>             | 3000K CRI80, 4000K CRI80   |
| <b>Dimming type</b>          | On/Off, 1-10V, DALI  |
| <b>Product colours</b>       | Black, Dark Grey, White,<br>Matt Silver, Bronze,<br>Concrete - Urban, Softscape<br>- Urban, Stone - Urban,<br>Corten - Urban, Oak -<br>Woodland, Walnut -<br>Woodland, Pine - Woodland |
| <b>Weight</b>                | 32.6 kg  |
| <b>Operating temperature</b> | -20 °C to 40 °C  |
| <b>EPA (m2)</b>              | 0.511  |

|                                 |   |
|---------------------------------|---|
| <b>Cable</b>                    | One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable  |
| <b>Through wiring</b>           | Single cable entry  |
| <b>Lens / Reflector / Optic</b> | Mat finishing aluminium reflector, Clear UV-stabilised polycarbonate diffuser                                   |
| <b>MacAdam Ellipse</b>          | 3 SDCM  |
| <b>Lifetime L90B10 (hours)</b>  | > 55,000  |
| <b>Variants (1-10V, DALI)</b>   | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

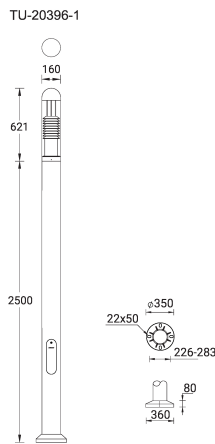

**TAURAS 3 (TU-20396-1)****Accessory**

---



Root mount kit  
**A20691**



Circuit breaker box IP44  
**A21291**



DALI Control System  
**Control-DALI**

**Pole (required)**

---



2.5 m - Cylindrical, straight  
aluminium pole for TAURAS  
**APD125160-TU-20396-1**