

VANCOUVER 41 (VA-20191)



Product description

160x160 mm - 3000 mm - No decorative pattern - IP65



microPrim™

Luminaire Structure


- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear
- Maximum wind load resistance is 160 km/h
- Surge protection 10kV
- VANCOUVER luminaires with projectors on top and colder than 3000K CCT do not meet the IDA certification requirements

Optic




G

Product colour

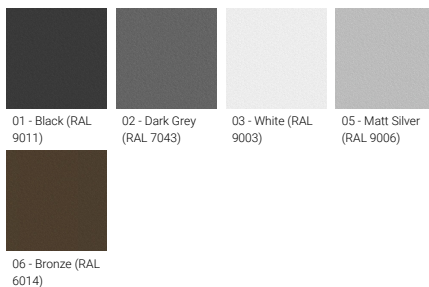


Special finishes upon request

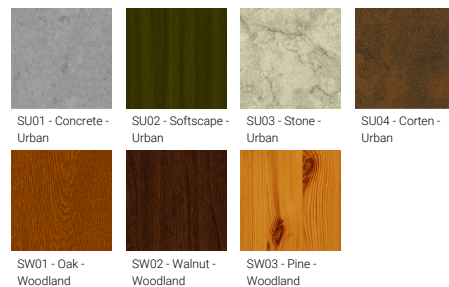

VANCOUVER 41 (VA-20191)

Technical information

Material	Aluminium	Optic	G	Cable	One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
Light source	1 COB	Optic value	143°	Through wiring	Single cable entry
Power	20 W	CCT / CRI	3000K CRI80, 4000K CRI80	Lens / Reflector / Optic	High-efficiency optical reflector, Clear toughened glass
Lumen	1233 - 1326 lm	Dimming type	On/Off, 1-10V, DALI	MacAdam Ellipse	3 SDCM
Efficacy	62 - 66 lm/W	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape	Lifetime L90B10 (hours)	> 61,000
Driver option	Integral control gear		- Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Driver	Constant current (CC)				
Input voltage	220-240 V 50/60 Hz	Weight	25.0 kg		
		Operating temperature	-20 °C to 40 °C		
		EPA (m2)	0.517		

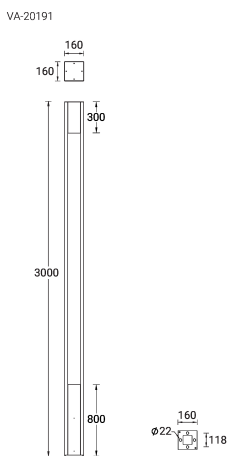

VANCOUVER 41 (VA-20191)

Accessory



Circuit breaker box IP44
A21291



Root mount kit
A20991



DALI Control System
Control-DALI