

**MARVEL 1 (MAV-20004)**



**Product description**

Ø70 mm - Supplied with specific 2.5 m cylindrical, straight aluminium pole: APD125070-MARVEL - Optic 270°



microPrim™

**Luminaire Structure**


- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear

**Optic**




G

**Product colour**

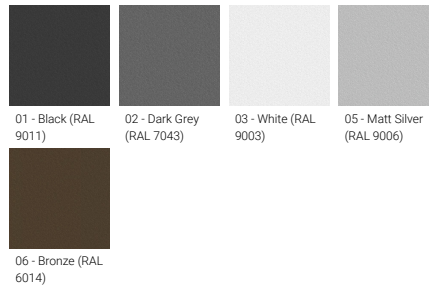

**Special finishes upon request**

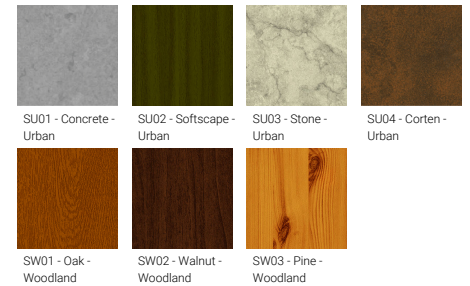

**MARVEL 1 (MAV-20004)**

**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	18 LED
<b>Power</b>	23 W
<b>Lumen</b>	2164 - 2278 lm
<b>Efficacy</b>	94 - 99 lm/W
<b>Driver option</b>	Integral control gear
<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	220-240 V 50/60 Hz

<b>Optic</b>	G
<b>Optic value</b>	88°X 134°
<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80
<b>Bug</b>	B1-U2-G1
<b>ULR</b>	1%
<b>ULOR</b>	1%
<b>CIE flux code n°3</b>	98
<b>Dimming type</b>	On/Off, DALI

<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	8.0 kg
<b>Operating temperature</b>	-20 °C to 40 °C
<b>EPA (m2)</b>	0.212
<b>Cable</b>	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
<b>Through wiring</b>	Single cable entry
<b>Lens / Reflector / Optic</b>	High-efficiency PMMA lens, Clear toughened glass
<b>Variants (DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)



**MARVEL 1** (MAV-20004)**Accessory**

---



---

Root mount kit  
**A24391**

---

**Pole (required)**

---



---

2.5 m - Cylindrical, straight  
aluminium pole for MARVEL  
**APD125070-MARVEL**

---