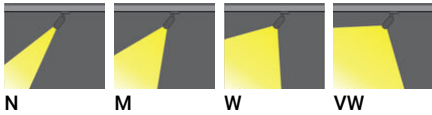



**BELIZE 1** (BEZ-80001)**Product description**

Ø55 - 231 mm

**Luminaire Structure**

- Extruded aluminium housing with powder coating
- Adjustable: Tilt 180°, Rotation 360°
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- High-efficiency optical reflector or high-efficiency polycarbonate lens
- Integral control gear
- With 3-phase universal adapter

**Optic****Product colour**


**BELIZE 1 (BEZ-80001)**

**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	1 COB
<b>Power</b>	12 W
<b>Lumen</b>	791 - 864 lm
<b>Efficacy</b>	66 - 72 lm/W
<b>Driver option</b>	Integral control gear


<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	220-240 V 50/60 Hz
<b>Optic</b>	N, M, W, VW
<b>Optic value</b>	20°, 34°, 46°, 54°
<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80
<b>ULR</b>	<1%

<b>ULOR</b>	<1%
<b>Dimming type</b>	On/Off, DALI
<b>Product colours</b>	Black, White
<b>Weight</b>	0.3 kg
<b>Operating temperature</b>	-20 °C to 50 °C
<b>Lens / Reflector / Optic</b>	High-efficiency optical reflector or high-efficiency polycarbonate lens

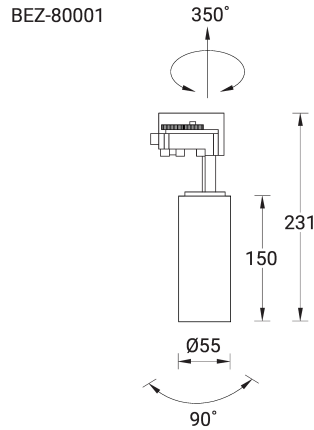

**BELIZE 1 (BEZ-80001)****Accessory**

---



---

Honeycomb louvre  
**A80115**

---



---

Surface mounted track adapter -  
Black DA  
**A80119**

---



---

Surface mounted track adapter -  
White DA  
**A80120**

---



---

Surface mounted track adapter -  
Black ND  
**A80122**

---



---

Surface mounted track adapter -  
White ND  
**A80123**

---