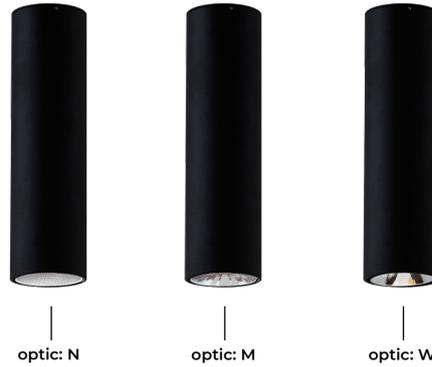


BRISBANE 5 (BRB-80001)**Product description**

Ø60 mm

**Luminaire Structure**

- Extruded aluminium housing with powder coating
- Reflector finishes options (Satin black, Satin gold, Matt white)
- Thin 1.3mm white polycarbonate trim
- Remote driver (included)
- CRI 95

Optic**Product colour**


BRISBANE 5 (BRB-80001)

Technical information

| | |
|----------------------|--------------------------|
| Material | Aluminium |
| Light source | 1 COB |
| Power | 10 W |
| Lumen | 985 - 1014 lm |
| Efficacy | 99 - 101 lm/W |
| Driver option | Remote driver (included) |
| Driver | Constant current (CC) |

| | |
|----------------------|--------------------------|
| Input voltage | 220-240 V 50/60 Hz |
| Optic | N, M, W |
| Optic value | 24°, 35°, 50° |
| CCT / CRI | 3000K CRI95, 4000K CRI95 |
| Bug | B1-U0-G0 |
| ULR | <1% |
| ULOR | <1% |

| | |
|---------------------------------|---|
| CIE flux code n°3 | 100 |
| Dimming type | On/Off |
| Product colours | Black, White |
| Weight | 0.9 kg |
| Operating temperature | -20 °C to 40 °C |
| Lens / Reflector / Optic | Reflector finishes options (Satin black, Satin gold, Matt white), Thin 1.3mm white polycarbonate trim |

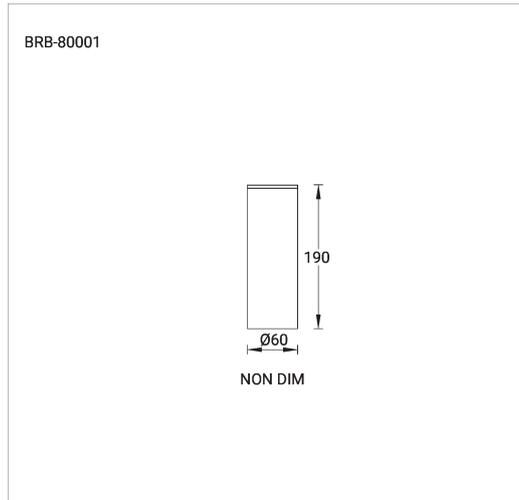

BRISBANE 5 (BRB-80001)**Accessory**



Reflector finish (Matt white)
A80022-MW



Reflector finish (Satin black)
A80022-SB



Reflector finish (Satin gold)
A80022-SG
