

NORDSTROM 3 (NOD-50021)



Product description

Integral control gear - 120x120 mm - Class I



microPrim™


Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Thermal heat dissipation body
- Single cable entry

- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens

- Clear toughened glass
- Integral control gear


Optic

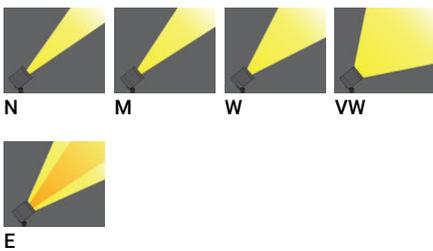

Product colour



Special finishes upon request

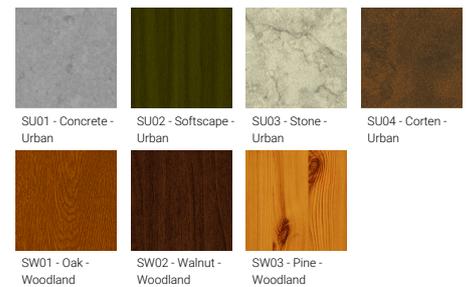

NORDSTROM 3 (NOD-50021)


Technical information

Material	Aluminium
Light source	9 LED
Power	21 W
Lumen	1921 - 2364 lm
Efficacy	91 - 113 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	N, M, W, VW, E
Optic value	10°, 17°, 34°, 70°, 43°x11°

CCT / CRI	3000K CRI80, 4000K CRI80	
Bug	B2-U0-G0, B3-U0-G0	
ULR	<1%	
ULOR	0, <1%	
CIE flux code n°3	100	
Dimming type	On/Off, DALI	
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	
	Weight	2.7 kg
	Operating temperature	-20 °C to 40 °C
	EPA (m2)	0.023

Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	High-efficiency PMMA lens, Clear toughened glass
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 120,000
Lifetime L80B10 (hours)	> 120,000
Lifetime L80B50 (hours)	> 120,000
Variants (On/Off, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

NOD-50021

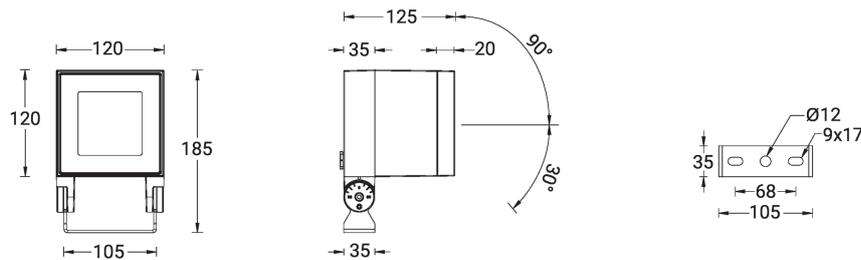


NORDSTROM 3 (NOD-50021)**Accessory**

Anti-glare visor
A53031



Ground spike
A50441

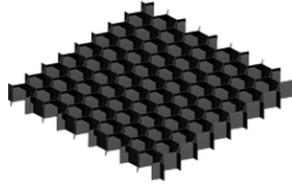

Honeycomb louvre
A52021



Linear spread lens
A51314



DALI Control System
Control-DALI

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.