

LUNAR 4 (LAN-90007)



Product description

Top Ø850 mm - 4 sides




microPrim™


Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear


Optic

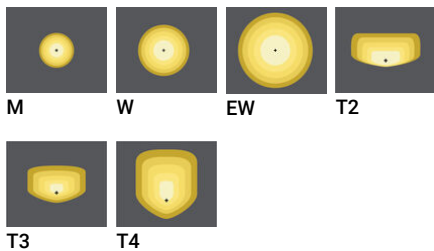

Product colour

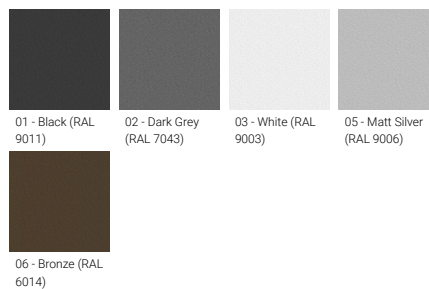

Special finishes upon request

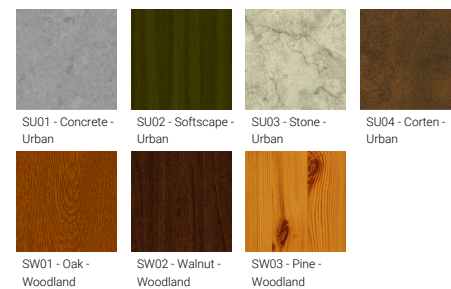

LUNAR 4 (LAN-90007)

Technical information

Material	Aluminium	Optic value	30°, 56°, 110°, 139°x59°, 122°x87°, 106°x71°	Operating temperature	-20 °C to 40 °C
Light source	4 x 12 LED	CCT / CRI	3000K CRI80, 4000K CRI80	Lens / Reflector / Optic	Clear toughened glass, High-efficiency PMMA lens
Power	79 W	Bug	B1-U0-G0, B1-U0-G1, B2-U0-G0	MacAdam Ellipse	3 SDCM
Lumen	8592 - 9892 lm	ULR	<1%	Lifetime L90B10 (hours)	> 90,000
Efficacy	108 - 125 lm/W	ULOR	<1%	Lifetime L80B10 (hours)	> 90,000
Driver option	Integral control gear	CIE flux code n°3	97, 99	Lifetime L80B50 (hours)	> 90,000
Driver	Constant current (CC)	Dimming type	On/Off, 1-10V, DALI	Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Input voltage	220-240 V 50/60 Hz	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland		
Optic	M, W, EW, T2, T3, T4	Weight	32.5 kg		

LAN-90007

