

SPACE 1 (SP-20556-1)



Product description

Dome top




microPrim™


Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear UV-stabilised polycarbonate diffuser
- Sandblast finishing aluminium reflector
- Integral control gear


Optic



Product colour

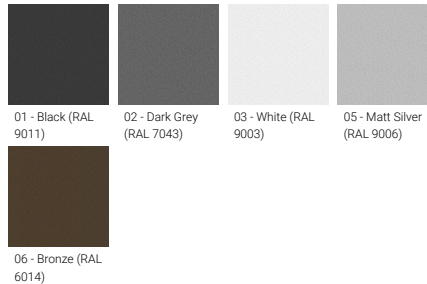

Special finishes upon request

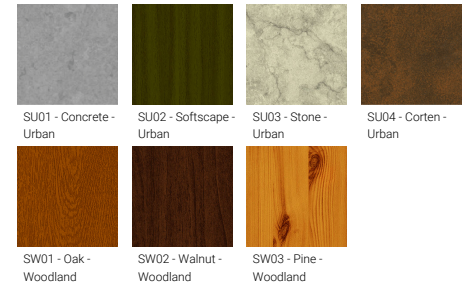

SPACE 1 (SP-20556-1)

Technical information

Material	Aluminium	Driver	Constant current (CC)	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	1 COB	Input voltage	220-240 V 50/60 Hz	Weight	10.5 kg
Power	41 W	Optic	G	Operating temperature	-20 °C to 40 °C
Lumen	1099 - 1113 lm	Optic value	175°x 177°	MacAdam Ellipse	3 SDCM
Efficacy	27 lm/W	CCT / CRI	3000K CRI80, 4000K CRI80	Lifetime L90B10 (hours)	> 55,000
Driver option	Integral control gear	Dimming type	On/Off, 1-10V, DALI	Variants (1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

SPACE 1
SP-20556-1

