

LIGHTSOFT 15 (LH-10671)



Product description

Ø186 - 1000 mm - Round - 27° side light - IK10



microPrim™

Luminaire Structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear UV-stabilised polycarbonate diffuser
- Anodised, high-purity aluminium reflector
- Integral control gear

Optic



G

Product colour



Special finishes upon request



LIGHTSOFT 15 (LH-10671)


Technical information

Material	Aluminium
Light source	12 LED (Top) & 7 LED (Side)
Power	39 W
Lumen	2325 - 2550 lm
Efficacy	60 - 65 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	G
Optic value	360°
CCT / CRI	2700K CRI80, 3000K CRI80, 4000K CRI80
Bug	B1-U3-G2
ULR	11%
ULOR	11%
CIE flux code n°3	74
Dimming type	On/Off, 1-10V, DALI

Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	9.0 kg
Operating temperature	-20 °C to 40 °C
Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	Clear UV-stabilised polycarbonate diffuser, Anodised, high-purity aluminium reflector
Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

LH-10671

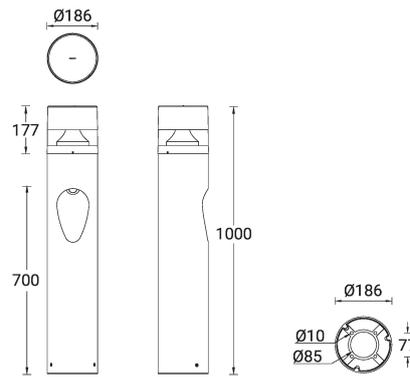


LIGHTSOFT 15 (LH-10671)**Accessory**

Anchor bolt
A10391



Light shield 180°
A10731



Light shield 90°
A10831



DALI Control System
Control-DALI

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.