

ALDO 5 (ALD-30241) (Version 3)



Product description

Without remote driver - Constant voltage (CV) 24 V - 18x45 mm - 525 mm - Class III - IK07




microPrim™

Luminaire Structure

- Powder coated aluminium alloy housing
- Adjustable aluminium extrusion bracket for ALD-30261, ALD-30262, ALD-30263, ALD-30264, ALD-30265, ALD-30266, ALD-30271, ALD-30272, ALD-30281, ALD-30282, ALD-30291, ALD-30292, ALD-30301, ALD-30302, ALD-30801
- Adjustable galvanised steel bracket for ALD-30241, ALD-30242, ALD-30243, ALD-30244, ALD-30251, ALD-30252, ALD-30253, ALD-30254, ALD-30255, ALD-30256
- Two cable entries for through wiring
- Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable
- Clear toughened glass
- Remote driver (not included)
- Uniform light distribution with uninterrupted end-to-end mounting.
- For ALD-30001 not included 24 VDC input, DMXRDM address with stable signal


Optic



Product colour



Special finishes upon request

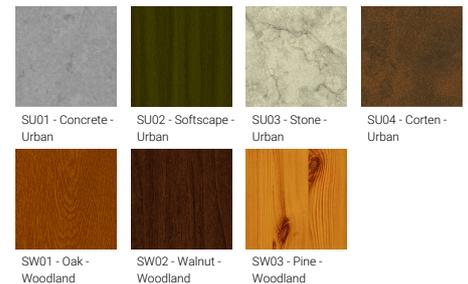

ALDO 5 (ALD-30241) (Version 3)


Technical information

Material	Aluminium
Light source	30 LED
Power	6 W
Lumen	326 - 404 lm
Efficacy	54 - 67 lm/W
Driver option	Remote driver (not included)
Driver	Constant voltage (CV)
Input voltage	24 VDC

Optic	VW, EW
Optic value	68°, 92°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B0-U0-G0
ULR	<1%
ULOR	<1%
CIE flux code n°3	98
Dimming type	On/Off

Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	0.2 kg
Operating temperature	-20 °C to 40 °C
Cable	Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable
Through wiring	Two cable entries for through wiring
Lens / Reflector / Optic	Clear toughened glass

ALD-30241

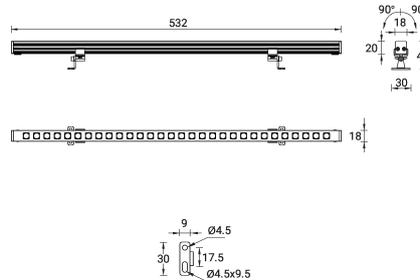


ALDO 5 (ALD-30241) (Version 3)

Accessory




Cable - Connector IP67 Female 2 Pin Power - 1000 mm
A65491-001

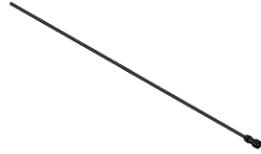

Cable - Connector IP67 Female 2 Pin Power - 5000 mm
A65491-005



Cable - Connector IP67 Female + Male 2 Pin Power - 1000 mm
A65591-001

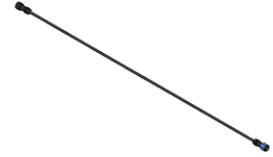

Cable - Connector IP67 Female + Male 2 Pin Power - 5000 mm
A65591-005



Connector IP67 Female 2 Pin Power
A68191



Connector IP67 Male 2 Pin Power
A68291



End cap - Connector IP67 Female 2 Pin and 3 Pin Power
A67991



End cap - Connector IP67 Male 2 Pin and 3 Pin Power
A68091



Driver (CV) - On/Off - 36 W - IP67 - 24 V
A34491-ND



Driver (CV) - On/Off - 60 W - IP67 - 24 V
A34591-ND



Driver (CV) - On/Off - 100 W - IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 150 W - IP67 - 24 V
A34891-ND



Driver (CV) - On/Off - 200 W - IP67 - 24 V
A34991-ND



Driver (CV) - On/Off - 350 W - IP67 - 24 V
A35091-ND