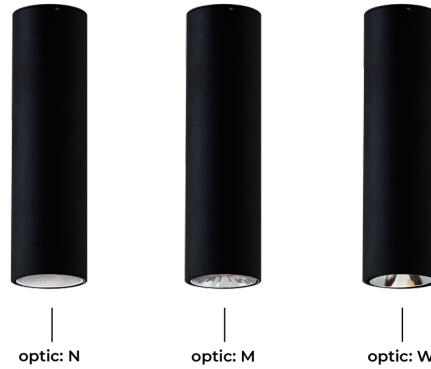



BRISBANE 5 (BRB-80001)**Product description**

Ø60 mm

**Luminaire Structure**

- Extruded aluminium housing with powder coating
- Reflector finishes options (Satin black, Satin gold, Matt white)
- Thin 1.3mm white polycarbonate trim
- Remote driver (included)
- CRI 95

Optic**Product colour**


BRISBANE 5 (BRB-80001)

Technical information

Material	Aluminium
Light source	1 COB
Power	10 W
Lumen	985 - 1014 lm
Efficacy	99 - 101 lm/W
Driver option	Remote driver (included)
Driver	Constant current (CC)

Input voltage	220-240 V 50/60 Hz
Optic	N, M, W
Optic value	24°, 35°, 50°
CCT / CRI	3000K CRI95, 4000K CRI95
Bug	B1-U0-G0
ULR	<1%
ULOR	<1%

CIE flux code n°3	100
Dimming type	On/Off
Product colours	Black, White
Weight	0.9 kg
Operating temperature	-20 °C to 40 °C
Lens / Reflector / Optic	Reflector finishes options (Satin black, Satin gold, Matt white), Thin 1.3mm white polycarbonate trim

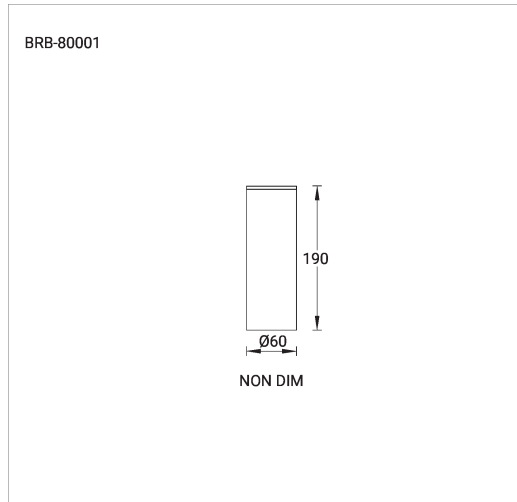


BRISBANE 5 (BRB-80001)**Accessory**



Reflector finish (Matt white)
A80022-MW



Reflector finish (Satin black)
A80022-SB



Reflector finish (Satin gold)
A80022-SG
