

KWH 11 (KWH-50042)



Product description

Large - 1 head - RGBW




microVos microPrim™

Luminaire Structure

- Die-cast aluminium end-caps
- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Thermal heat dissipation body
- Single or double head configuration for all three sizes
- Each of the heads can be aimed, adjusted and locked for precise aiming
- Single cable entry, through wiring upon request
- Three IP68 connectors supplied with 0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear
- Hot-dipped galvanised steel mounting bracket allows for ceiling, wall or surface mounting


Optic

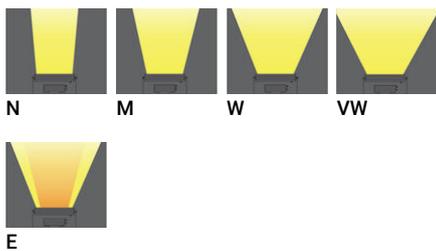

Product colour




Special finishes upon request

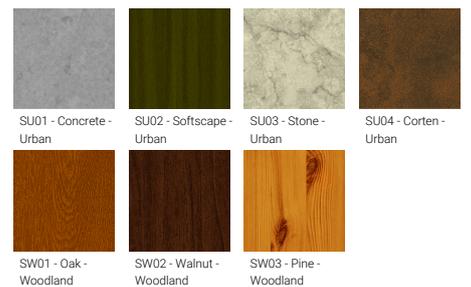

KWH 11 (KWH-50042)

Technical information

Material	Aluminium	Optic	N, M, W, VW, E	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	80 LED	Optic value	8°, 17°, 26°, 65°, 43°x11°	Weight	12.2 kg
Power	73 W	CCT / CRI	RGBW30, RGBW40	Operating temperature	-20 °C to 40 °C
Lumen	4401 - 5635 lm	Bug	B3-U0-G0, B4-U0-G0	EPA (m2)	0.122
Efficacy	60 - 77 lm/W	ULR	<1%	Cable	Three IP68 connectors supplied with 0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
Driver option	Integral control gear	ULOR	<1%	Through wiring	Single cable entry, through wiring upon request
Driver	Constant current (CC)	CIE flux code n°3	100	Lens / Reflector / Optic	Clear toughened glass, High-efficiency PMMA lens
Input voltage	220-240 V 50/60 Hz	Dimming type	DMX, DMX/RDM		

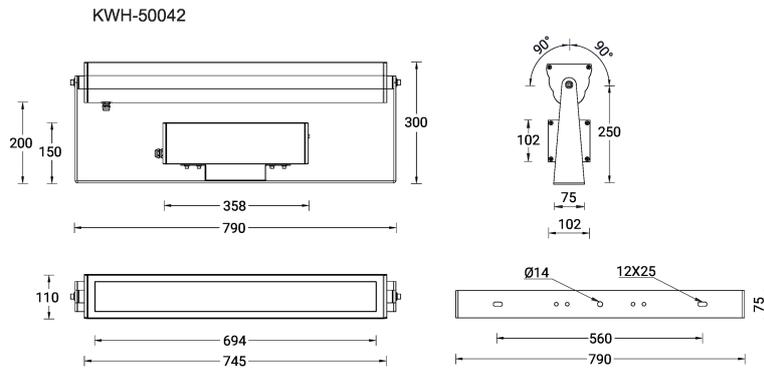

Accessory



DMX Control System
Control-DMX



DMX/RDM Control System
Control-DMX-RDM
