

LIGHTTALK 17 (LA-40031) (Version 1)



Product description

Without remote driver / recessing box - Constant voltage (CV) 24 V - 455 mm - Class III - RGBW




microPrim™


Luminaire Structure

- Die-cast aluminium end-caps
- Extruded aluminium housing and sheet aluminium front frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel frame on request
- Two cable entries for through wiring
- Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (not included)
- Recessing box is not included
- 24 VDC input, DMX/RDM address with stable signal


Optic

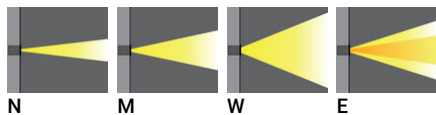

Product colour

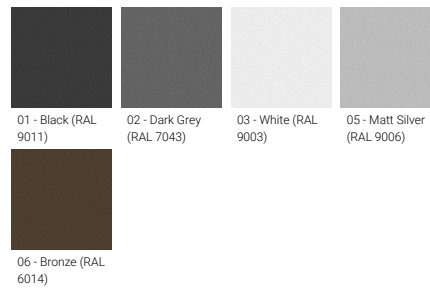

Special finishes upon request

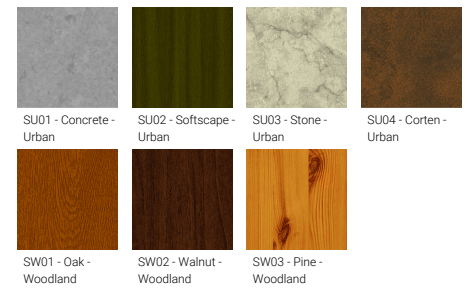

LIGHTALK 17 (LA-40031) (Version 1)


Technical information

| | |
|----------------------|------------------------------|
| Material | Aluminium |
| Light source | 12 LED |
| Power | 16 W |
| Lumen | 510 - 903 lm |
| Efficacy | 7 - 13 lm/W |
| Driver option | Remote driver (not included) |

| | |
|----------------------|---------------------------|
| Driver | Constant voltage (CV) |
| Input voltage | 24 VDC |
| Optic | N, M, W, E |
| Optic value | 16°, 32°, 55°, 20°x30° |
| CCT / CRI | RGB+Amber, RGBW30, RGBW40 |
| Dimming type | DMX, DMX/RDM |

| | |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Weight | 2.8 kg |
| Operating temperature | -20 °C to 40 °C |
| Cable | Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable |
| Through wiring | Two cable entries for through wiring |
| Lens / Reflector / Optic | Clear toughened glass |

LA-40031

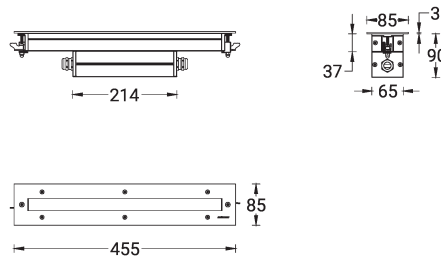

LIGHTALK 17 (LA-40031) (Version 1)

Accessory



DMX Control System
Control-DMX



DMX/RDM Control System
Control-DMX-RDM



Driver (CV) - On/Off - 60 W - IP67
- 24 V
A34591-ND



Driver (CV) - On/Off - 100 W -
IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 150 W -
IP67 - 24 V
A34891-ND



Recessing box
A61751