

LIGHTALK 19 (LA-95051) (Version 1)



Product description

Without remote driver - Constant voltage (CV) 24 V - 610 mm - Class III - RGBW




microPrim™

Luminaire Structure

- Die-cast aluminium end-caps
- Extruded aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Four IP67 connectors supplied with 2x0.3 m of 2x1.0 sqmm outdoor cable and 2x0.3 m of 2x0.5 sqmm outdoor shielded cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (not included)
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- Stainless steel suspension kit in grade 304
- Suspension height is fully adjustable


Optic

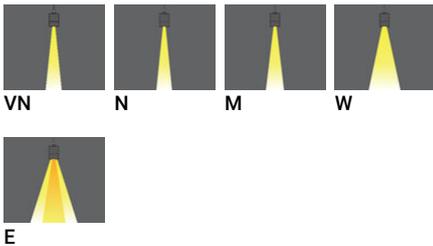

Product colour



Special finishes upon request

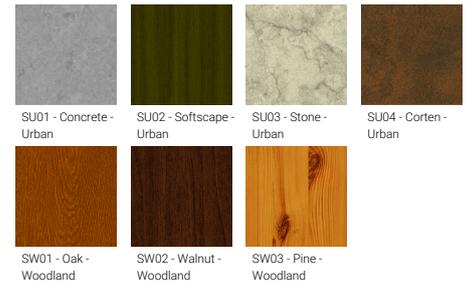

LIGHTALK 19 (LA-95051) (Version 1)


Technical information

Material	Aluminium
Light source	20 LED
Power	33 W
Lumen	1592 - 1916 lm
Efficacy	48 - 58 lm/W
Driver option	Remote driver (not included)
Driver	Constant voltage (CV)
Input voltage	24 VDC

Optic	VN, N, M, W, E
Optic value	10°, 13°, 24°, 43°, 16° x 35°
CCT / CRI	RGBW30, RGBW40
Dimming type	DMX, DMX/RDM
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	3.8 kg
Operating temperature	-20 °C to 40 °C
EPA (m2)	0.061

Cable	Four IP67 connectors supplied with 2x0.3 m of 2x1.0 sqmm outdoor cable and 2x0.3 m of 2x0.5 sqmm outdoor shielded cable
Through wiring	Two cable entries for through wiring
Lens / Reflector / Optic	Clear toughened glass
MacAdam Ellipse	7 SDCM
Lifetime L90B10 (hours)	> 50,000
Lifetime L80B10 (hours)	> 68,000
Lifetime L80B50 (hours)	> 100,000

LA-95051

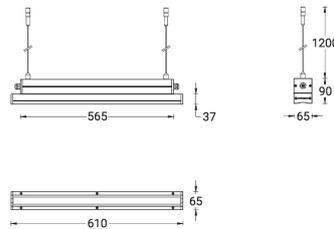

LIGHTALK 19 (LA-95051) (Version 1)**Accessory**

DMX Control System
Control-DMX



DMX/RDM Control System
Control-DMX-RDM



Driver (CV) - On/Off - 36 W - IP67
- 24 V
A34491-ND



Driver (CV) - On/Off - 60 W - IP67
- 24 V
A34591-ND



Driver (CV) - On/Off - 100 W -
IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 200 W -
IP67 - 24 V
A34991-ND



Driver (CV) - On/Off - 350 W -
IP67 - 24 V
A35091-ND