

NYBRO 6 (NYB-80636)



Product description

Down - 60x80 mm - 1466 mm - RGBW



microPrim™

Luminaire Structure

- Die-cast aluminium end-caps and extruded aluminium profile with powder coating
- Passive thermal management
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control

- Integral control gear
- Steel brackets for ceiling down mounting option
- Up and down light distribution options
- Wireless control available through Bluetooth connection

- Daylight and occupancy sensor options
- Emergency module (1 or 3 hours) is available upon request with 3 options (BASIC, SELF-TEST, PRO-DALI)

Optic



Product colour



01 - Black (RAL 9011) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)

Special finishes upon request



SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban




SW01 - Oak - Woodland SW02 - Walnut - Woodland SW03 - Pine - Woodland

NYBRO 6 (NYB-80636)

Technical information

Material	Aluminium	Driver option	Integral control gear	CCT / CRI	RGBW40
Light source	240 LED	Driver	Constant current (CC)	Dimming type	Bluetooth
Power	53 W	Input voltage	220-240 V 50/60 Hz	Product colours	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Lumen	2500 lm	Optic	O, P		
Efficacy	47 lm/W	Optic value	Opal, Micro-prismatic		
				Weight	4.4 kg
				Operating temperature	-20 °C to 40 °C

NYB-80636

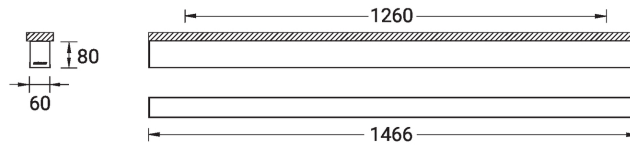

NYBRO 6 (NYB-80636)**Accessory**

Ceiling-mounting bracket
A81281



Wireless bluetooth converter
A90291



Xpress wireless switch
A90591



Recessing box
A61051



DALI Control System
Control-DALI