

SANDY 1 (SA-31471) (Version 2)



Product description

Small




microPrim™

Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

Optic



G

Product colour



Special finishes upon request




SANDY 1 (SA-31471) (Version 2)

Technical information

Material	Aluminium	Optic	G	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	80 LED	Optic value	114°x97°		
Power	19 W	CCT / CRI	3000K CRI80, 4000K CRI80	Weight	2.1 kg
Lumen	1587 - 1671 lm	Bug	B0-U4-G2	Operating temperature	-20 °C to 40 °C
Efficacy	84 - 88 lm/W	ULR	50	Through wiring	Two cable entries for through wiring
Driver option	Integral control gear	ULOR	50	Lens / Reflector / Optic	Opal UV-stabilised polycarbonate diffuser
Driver	Constant current (CC)	CIE flux code n°3	69	Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Input voltage	220-240 V 50/60 Hz	Dimming type	On/Off, 1-10V, DALI		

SA-31471

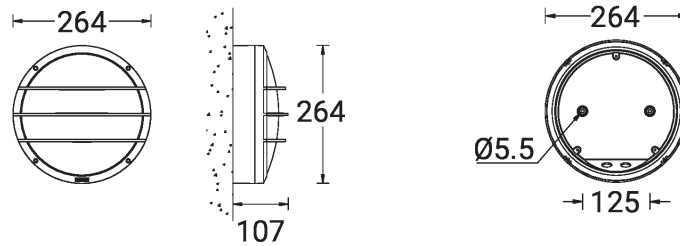

SANDY 1 (SA-31471) (Version 2)**Accessory**



Surface mounting box for easy
cabling (SANDY 1)
SCE-SANDY-1



DALI Control System
Control-DALI
