

**LIGHTALK 15 (LA-30034) (Version 1)**



**Product description**

Without remote driver - Constant voltage (CV) 24 V - 610 mm - Class III - RGBW




microPrim™

**Luminaire Structure**

- Die-cast aluminium end-caps
- Extruded aluminium housing and sheet aluminium front frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (not included)
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- 24 VDC input, DMX/RDM address with stable signal

**Optic**



**Product colour**



**Special finishes upon request**



**LIGHTALK 15 (LA-30034) (Version 1)**


**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	18 LED
<b>Power</b>	35 W
<b>Lumen</b>	905 - 2012 lm
<b>Efficacy</b>	26 - 57 lm/W
<b>Driver option</b>	Remote driver (not included)

<b>Driver</b>	Constant voltage (CV)
<b>Input voltage</b>	24 VDC
<b>Optic</b>	N, M, W, E
<b>Optic value</b>	16°, 32°, 55°, 20°x30°
<b>CCT / CRI</b>	RGB+Amber, RGBW30, RGBW40
<b>Dimming type</b>	DMX, DMX/RDM

<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	3.7 kg
<b>Operating temperature</b>	-20 °C to 40 °C
<b>Cable</b>	Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
<b>Through wiring</b>	Two cable entries for through wiring
<b>Lens / Reflector / Optic</b>	Clear toughened glass

**LA-30034**

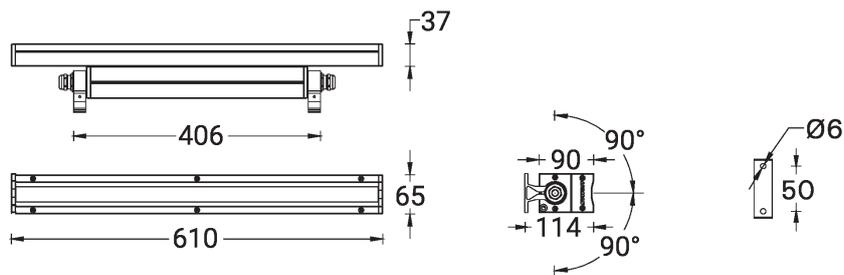

**LIGHTALK 15 (LA-30034) (Version 1)****Accessory**

DMX Control System  
**Control-DMX**



DMX/RDM Control System  
**Control-DMX-RDM**



Driver (CV) - On/Off - 60 W - IP67  
- 24 V  
**A34591-ND**



Driver (CV) - On/Off - 100 W -  
IP67 - 24 V  
**A34791-ND**



Driver (CV) - On/Off - 150 W -  
IP67 - 24 V  
**A34891-ND**



75 mm extend arm mounting  
**A30891**



150 mm extend arm mounting  
**A30991**



300 mm extend arm mounting  
**A31091**



450 mm extend arm mounting  
**A31191**



Driver (CV) - On/Off - 200 W -  
IP67 - 24 V  
**A34991-ND**



Driver (CV) - On/Off - 350 W -  
IP67 - 24 V  
**A35091-ND**