

**LEEDS 2 (LEE-30001)**



**Product description**

Down - Square




microPrim™

**Luminaire Structure**

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

**Optic**

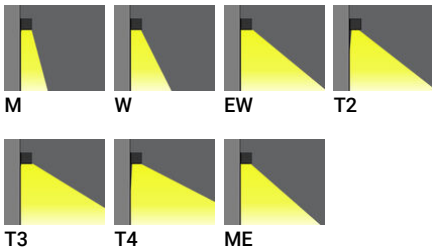

**Product colour**



**Special finishes upon request**



**LEEDS 2 (LEE-30001)**


**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	4 LED
<b>Power</b>	8 W
<b>Lumen</b>	545 - 795 lm
<b>Efficacy</b>	78 - 114 lm/W
<b>Driver option</b>	Integral control gear
<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	220-240 V 50/60 Hz
<b>Optic</b>	M, W, EW, T2, T3, T4, ME

<b>Optic value</b>	30°, 56°, 99°x102°, 130°x50°, 112°x80°, 90°x61°, 122°x50°
<b>CCT / CRI</b>	2700K CRI80, 3000K CRI80, 4000K CRI80
<b>Bug</b>	B0-U0-G0, B0-U1-G0, B1-U0-G0, B1-U1-G0, B1-U1-G1, B1-U2-G0, B1-U2-G1
<b>ULR</b>	1%, <1%
<b>ULOR</b>	1%, <1%
<b>CIE flux code n°3</b>	100, 96, 97
<b>Dimming type</b>	On/Off
<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	0.8 kg

<b>Operating temperature</b>	-20 °C to 50 °C
<b>Through wiring</b>	Single cable entry
<b>Lens / Reflector / Optic</b>	Clear toughened glass, High-efficiency PMMA lens
<b>MacAdam Ellipse</b>	3 SDCM
<b>Lifetime L90B10 (hours)</b>	> 90,000
<b>Lifetime L80B10 (hours)</b>	> 90,000
<b>Lifetime L80B50 (hours)</b>	> 90,000
<b>Variants (On/Off)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

**LEE-30001**

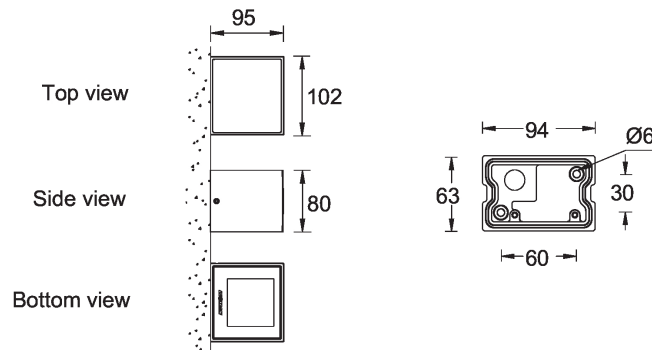

**LEEDS 2** (LEE-30001)**Accessory**

---



---

Surface mounting box for easy  
cabling (LEEDS 2)  
**SCE-LEEDS-2**

---